# Woodstock Series Wall Sconce WS1070S






| Model Number                                      | Lamping<br>Code | Body Lamping      | Circuit |
|---|-----------------|-------------------|---------|
| <b>WS10705</b><br>• W 10"<br>• HT 12"<br>• EXT 4" | DQA             | 2,600lm LED (21W) | 1       |
|   | BTE             | 1-40W T10 (40W)   | 1       |

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

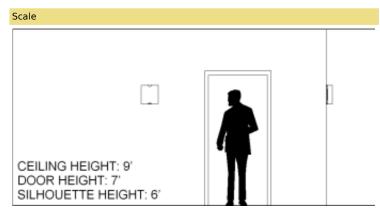

#### PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility

### Abbreviation Key

| Lamps           |                |  |
|-----------------|----------------|--|
| 40W T10 40W T10 | ), medium base |  |

# Dimming Types

0

D1

Mounts to standard electrical junction box (by others)
UL / cUL or ETL / cETL listed
Contact Us for more lamping options.