


# **Woodstock Series Wall Sconce WS2142S**






Model Number	Lamping Code	Body Lamping	Circuit
WS2142S	DQB	2,100lm LED (16W)	1
• W 9" • HT 20" • EXT 4"	BUC	2-60W A19 (120W)	1

### SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

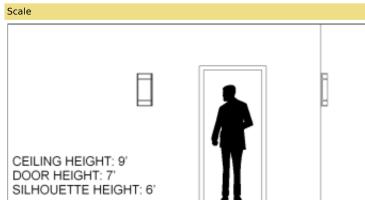

## Abbreviation Key

#### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

### **Dimming Types**

0 D1

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility

- Mounts to standard electrical junction box (by others)
  UL / cUL or ETL / cETL listed
  Contact Us for more lamping options.