


Wichita Series Wall Sconce



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
WT0816S • W 11 • HT 18 • EXT 6	DYW	1,000lm LED (7W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYK	1,800lm LED (14W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHS	1-60W A19 (60W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
WT1020S • W 14 • HT 22 • EXT 7	DYL	1,800lm LED (14W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYM	3,100lm LED (22W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHU	2-100W A21 (200W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
WT1224S • W 16 • HT 27 • EXT 8	DYO	6,300lm LED (40W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYN	7,100lm LED (44W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHX	3-100W A21 (300W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	60W A19 Medium Base, 60W Max, Incandesent or LED
	100W A21 Medium Base, 100W Max, Incandesent or LED
	Finish Types
	PC Powder Coat

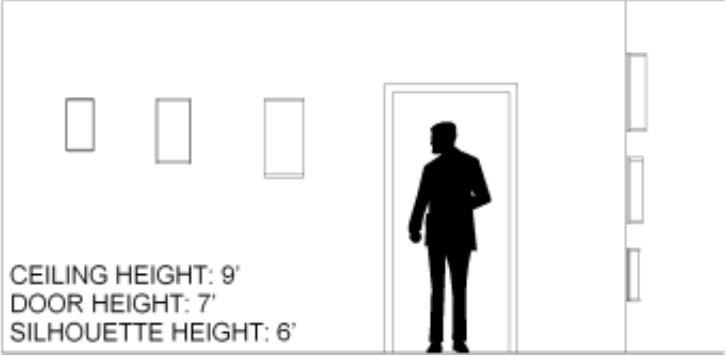

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Accent Types

WT	Wood Trim
CT	Custom Trim

Diffuser Types

WA	Standard Acrylic Diffuser
----	---------------------------

Mountings

WM	Wall Mount
----	------------

Louvers

BD	Bottom Perf Door
----	------------------

Dimming Types

0	D1
1	D2
2	D3

Options

SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens
BD	Bottom Door