


## **Austin Series Pendant**





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting
• W 3" • HT 24" • OAH 72" (OverAll Height)	BJG	3,000lm LED (18W)	1	PC	WA	ST CH AC
• W 3" • HT 36" • OAH 72" (OverAll Height)	GNL	3,600lm LED (22W)	1	PC	WA	ST CH AC
	CZP	7,100lm LED (44W)	1	PC	WA	ST CH AC
• W 3" • HT 48" • OAH 72" (OverAll Height)	ВЈЈ	4,800lm LED (29W)	1	PC	WA	ST CH AC
	FZN	8,300lm LED (58W)	1	PC	WA	ST CH AC

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Finish Types

PC Powder Coat


Diffuser Types

WA Standard Acrylic Diffuser

Mountings

ST

Stem

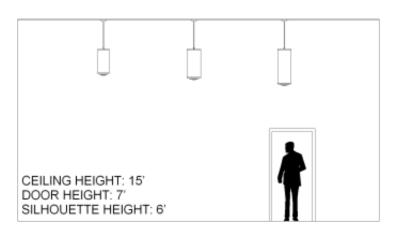

Chain

Air Craft Cable

## **Dimming Types**

СН

AC

0 D1 D3 1 2 D2

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
  Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
  Standard LED CCT is 3000 Kelvin contact us for alternate color temperature Standard LED CRI is 80 - contact us for alternate CRI availability
   Standard LED dimming is 0-10v
   Optional line voltage (Triac or ELV) LED dimming is available - consult for

- compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH Over All Height is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional
- structural support (by others)

   For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.