

Austin Series Pendant



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting
AU0324L	BJG	3,000lm LED (18W)	1	PC	AD	ST CH AC
<ul style="list-style-type: none"> • W 3 • HT 24 • OAH 72 (OverAll Height) 						
AU0336L	CZP	7,100lm LED (44W)	1	PC	AD	ST CH AC
<ul style="list-style-type: none"> • W 3 • HT 36 • OAH 72 (OverAll Height) 						
AU0348L	BJJ	4,800lm LED (29W)	1	PC	AD	ST CH AC
<ul style="list-style-type: none"> • W 3 • HT 48 • OAH 72 (OverAll Height) 						
	FZN	8,300lm LED (53W)	1	PC	AD	ST CH AC

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale


Abbreviation Key

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

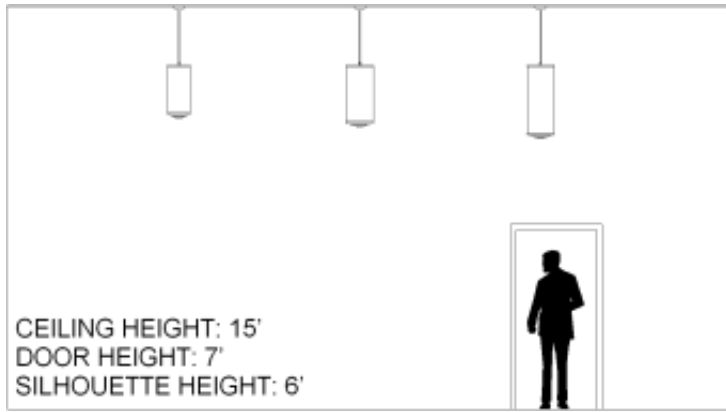

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Energy efficient LED lamping
- Wired for single circuit operation
- High power factor remote mounted electronic LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Fixture is Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Mountings

ST	Stem
CH	Chain
AC	Air Craft Cable

Dimming

D1	LED 0-10v dimming options include integral 120-277v dimming drivers
D2	LED Triac/ELV dimming options include integral 120v dimming drivers
D31A	LED 0-10v wireless dimming options include integral 120v dimming drivers and one wireless module
D32A	LED 0-10v wireless dimming options include integral 120v dimming drivers and two wireless modules
D12	LED 0-10v dimming options include integral 120-277v dimming drivers with 1% minimum dimming level