


Bedford Series Pendant

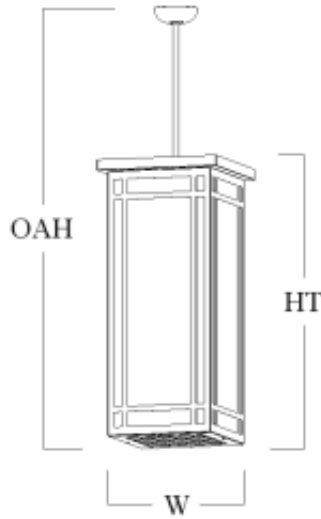

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
BF0816L	GKN	3,200lm LED (22W)	1	PC	AD	ST CH SM SP AC	SQ	D1 D2* D3 SIL
<ul style="list-style-type: none"> • W 08" • HT 24" • OAH 36" (OverAll Height) 								
BF0824L	GJW	4,800lm LED (31W)	1	PC	AD	ST CH SM SP AC	SQ	D1 D3 SIL
<ul style="list-style-type: none"> • W 08" • HT 24" • OAH 96" (OverAll Height) 								
BF0836L	GJV	7,300lm LED (49W)	1	PC	AD	ST CH SM SP AC	SQ	D1 D3 SIL
<ul style="list-style-type: none"> • W 08" • HT 36" • OAH 72" (OverAll Height) 								
BF0848L	ETV	9,600lm LED (66W)	1	PC	AD	ST CH SM SP AC	SQ	D1 D3 SIL
<ul style="list-style-type: none"> • W 08" • HT 48" • OAH 96" (OverAll Height) 								

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options


Scale

Abbreviation Key

Finish Types

PC Powder Coat

Diffuser Types

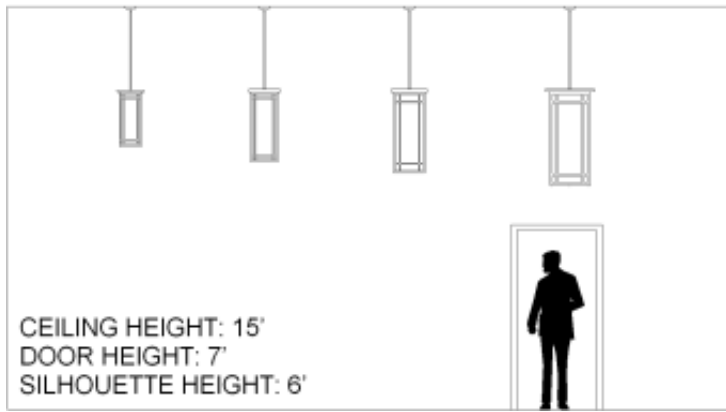

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AD Standard Acrylic Diffuser

Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem
AC	Air Craft Cable

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2
2	D3

Options

SIL	Silhouette Symbol
-----	-------------------