


Bedford Series Pendant





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
• W 08" • HT 24" • OAH 36" (OverAll Height)	GKN	3,200lm LED (22W)	1	PC	WA	ST CH SM SP AC	SQ	SIL
• W 08" • HT 24" • OAH 96" (OverAll Height)	GJW	4,800lm LED (31W)	1	PC	WA	ST CH SM SP AC	SQ	SIL
• W 08" • HT 36" • OAH 72" (OverAll Height)	GJV	7,300lm LED (49W)	1	PC	WA	ST CH SM SP AC	SQ	SIL
• W 08" • HT 48" • OAH 96" (OverAll Height)	ETV	9,600lm LED (66W)	1	PC	WA	ST CH SM SP AC	SQ	SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options


Scale

Abbreviation Key

Finish Types

PC Powder Coat

Diffuser Types

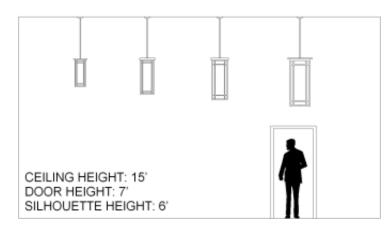

PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping

- Wired for dual circuit operation (Body Lamping/Down Lamping)
 High power factor electronic ballast or LED driver
 Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WA Standard Acrylic Diffuser

Mountings

ST Stem Chain CH

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

AC Air Craft Cable

Louvers

SQ Square Cell

Dimming Types

D1 0 1 D2 D3

Options

SIL Silhouette Symbol