


Billings Series Pendant





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
• W 24" • HT 8" • OAH 36" (OverAll Height)	GKV	8,600lm LED (58W)	1	PC	WA	ST SP	BL
• W 36" • HT 10" • OAH 60" (OverAll Height)	GKU	11,600lm LED (63W)	1	PC	WA	ST SP	BL
• W 42" • HT 11" • OAH 60" (OverAll Height)	GKT	15,700lm LED (87W)	1	PC	WA	ST SP	BL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Finish Types


PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

Stem

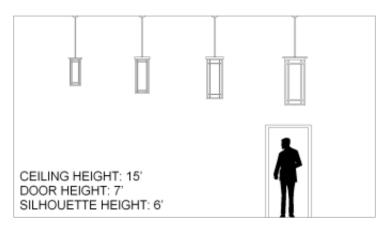

PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
 High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.

 • Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Stem hung (extra length may be added, specify OAH) (OAH Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Steep Pitch Canopy for Stem

Louvers

SP

BL **Bottom Lens**

Dimming Types

D1