


## Billings Series Pendant

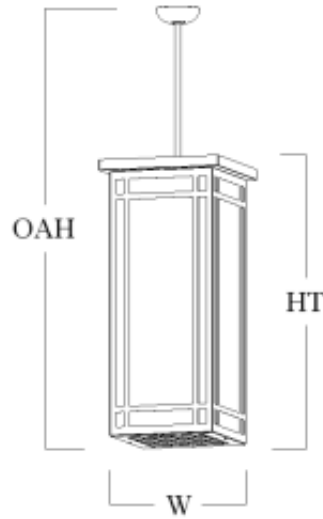

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louder
<b>BI2408L</b>	GKV	8,600lm LED (53W)	1	PC	AD	ST SP	BL
<ul style="list-style-type: none"> <li>• W 24"</li> <li>• HT 8"</li> <li>• OAH 36" (OverAll Height)</li> </ul>							
<b>BI3610L</b>	GKU	11,600lm LED (58W)	1	PC	AD	ST SP	BL
<ul style="list-style-type: none"> <li>• W 36"</li> <li>• HT 10"</li> <li>• OAH 60" (OverAll Height)</li> </ul>							
<b>BI4211L</b>	GKT	15,700lm LED (80W)	1	PC	AD	ST SP	BL
<ul style="list-style-type: none"> <li>• W 42"</li> <li>• HT 11"</li> <li>• OAH 60" (OverAll Height)</li> </ul>							

### SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

Scale

Abbreviation Key

#### Finish Types


PC Powder Coat

#### Diffuser Types

AD Standard Acrylic Diffuser

#### Mountings

ST Stem

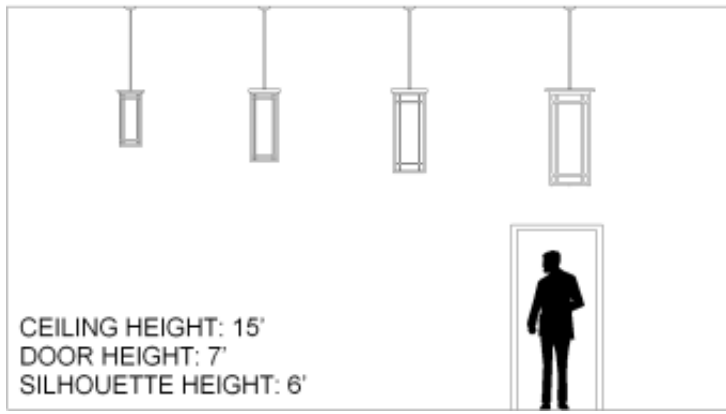

SP

Steep Pitch Canopy for Stem

Louvers

BL

Bottom Lens

Dimming Types

0

D1

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.