


Bristol Series Pendant

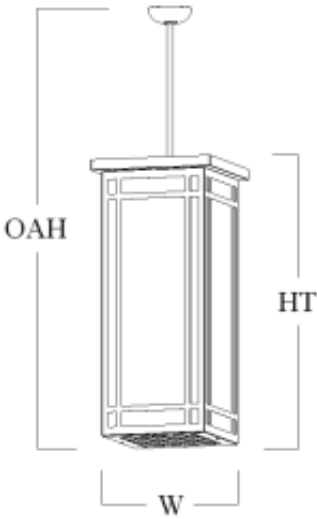


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
BL1024L • W 10" • HT 24" • OAH 72" (OverAll Height)	FJE	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA	ST SP AC	SQ	SIL
BL1326L • W 13" • HT 26" • OAH 96" (OverAll Height)	GHI	15,600lm LED (88W)	7,100lm LED (51W)	2	PC	WA	ST SP AC	SQ	SIL
	GHP	19,800lm LED (124W)	12,500lm LED (93W)	2	PC	WA	ST SP AC	SQ	SIL
	FJF	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	ST SP AC	SQ	SIL
BL1331L • W 13" • HT 31" • OAH 96" (OverAll Height)	GKY	15,600lm LED (88W)	7,100lm LED (51W)	2	PC	WA	ST SP AC	SQ	SIL
	DMR	24,000lm LED (150W)	12,500lm LED (93W)	2	PC	WA	ST SP AC	SQ	SIL
	FJG	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	ST SP AC	SQ	SIL
BL1436L • W 14" • HT 36" • OAH 96" (OverAll Height)	DHH	24,600lm LED (141W)	12,500lm LED (93W)	2	PC	WA	ST SP AC	SQ	SIL
	GEJ	30,900lm LED (176W)	12,500lm LED (93W)	2	PC	WA	ST SP AC	SQ	SIL
	FJH	9-60W A19 (540W)	1-100W PAR38 (100W)	3	PC	WA	ST SP AC	SQ	SIL
BL1842L • W 18" • HT 42" • OAH 120" (OverAll Height)	DNJ	39,400lm LED (229W)	12,500lm LED (93W)	2	PC	WA	ST SP AC	SQ	SIL
	FJI	12-MAX 45W LED Med. Base (540W)	1-100W A21 (100W)	2	PC	WA	ST SP AC	SQ	SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

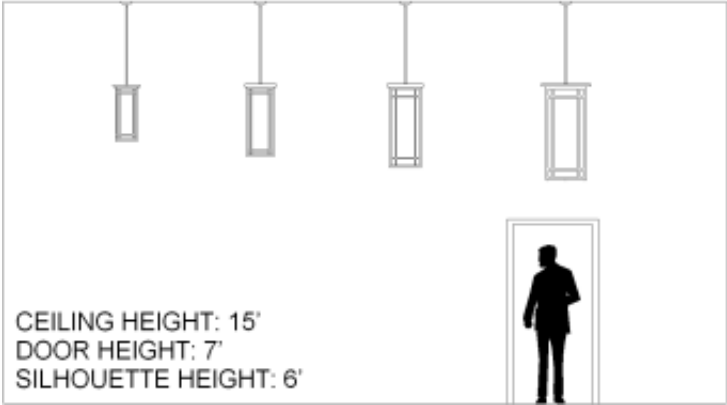

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- | | |
|-------------|---|
| 60W A19 | Medium Base, 60W Max, Incandesent or LED |
| 100W PAR38 | Medium Base, 100W Max, Incandesent or LED |
| MAX 45W LED | 45W-LED A21, medium base |
| Med. Base | |

Finish Types

- | | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

- | | |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
|----|---------------------------|

Mountings

- | | |
|----|-----------------------------|
| ST | Stem |
| SP | Steep Pitch Canopy for Stem |
| AC | Air Craft Cable |

Louvers

- | | |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

- | | |
|---|----|
| 0 | D1 |
| 1 | D2 |
| 2 | D3 |

Options

- | | |
|-----|-------------------|
| SIL | Silhouette Symbol |
|-----|-------------------|