


Bristol Series Pendant

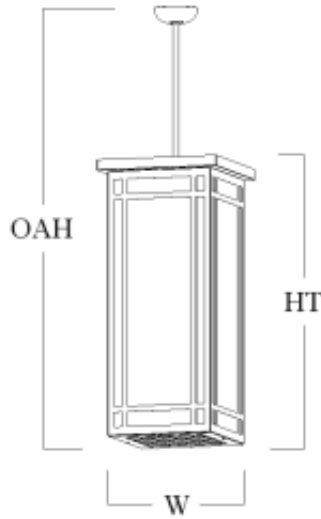

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louwer
BL0848L	ETV	4-44 VMU AL LED @ 300mA w/Lens		2	PC	AD AG	ST	SQ
<ul style="list-style-type: none"> • W 08" • HT 48" • OAH 96" (OverAll Height) 								
BL1024L	AWK	4-100W-A21 (400W)	1-300W-R40 (300W)	2	PC	AD AG	ST	SQ
<ul style="list-style-type: none"> • W 10" • HT 24" • OAH 72" (OverAll Height) 								
BL1326L	DMK	15,400lm LED (97W)	7,000lm LED (47W)	2	PC	AD AG	ST	SQ
<ul style="list-style-type: none"> • W 13" • HT 26" • OAH 96" (OverAll Height) 								
	DMN	19,600lm LED (129W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ
	DEW	6-100W-A21 (600W)	1-300W-R40 (300W)	2	PC	AD AG	ST	SQ
BL1331L	DMP	19,400lm LED (117W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ
<ul style="list-style-type: none"> • W 13" • HT 31" • OAH 96" (OverAll Height) 								
	DMR	24,000lm LED (147W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ
	DHT	6-100W-A21 (600W)	1-300W-R40 (300W)	2	PC	AD AG	ST	SQ
BL1436L	DHH	23,100lm LED (134W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ

- W 14"
- HT 36"
- OAH 96"
(OverAll Height)

DOG	31,800lm LED (195W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ
DHU	9-100W-A21 (900W)	1-300W-R40 (300W)	3	PC	AD AG	ST	SQ

BL1842L


- W 18"
- HT 42"
- OAH 120"
(OverAll Height)

DNJ	39,700lm LED (258W)	12,000lm LED (100W)	2	PC	AD AG	ST	SQ
DHV	12-100W-A21 (1200W)	1-300W-R40 (300W)	3	PC	AD AG	ST	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

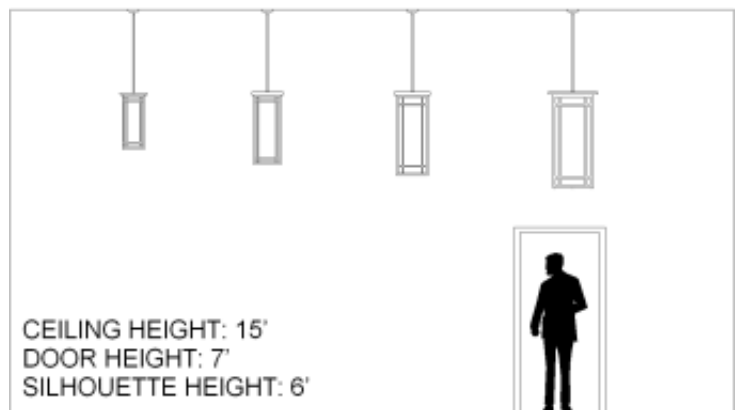

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamps

44 VMU AL LED @ 300mA w/Lens	3000 Kelvin Warm White LED
100W-A21	Medium Base, 100W Max, Incandesent or LED
300W-R40	300W R40, medium base

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
----	------

Louvers

SQ	Square Cell
----	-------------

Options

D1	LED 0-10V low voltage control dimming
D2	LED Triac/ELV-phase dimming