


## Bismarck Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
<b>BM108C</b> • W 12 • HT 10	GJT	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	AXP	2-100W A21 (200W)	1	PC	WA AG	CC	SQ
<b>BM1309C</b> • W 15 • HT 11	GJM	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	AXR	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
<b>BM1410C</b> • W 14 • HT 12	GJN	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	CWZ	3-100W A21 (300W)	1	PC	WA AG	CC	SQ

### SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

### Scale

### Abbreviation Key

#### Lamps


100W A21      Medium Base, 100W Max, Incandesent or LED

#### Finish Types

PC      Powder Coat

#### Diffuser Types

WA      Standard Acrylic Diffuser

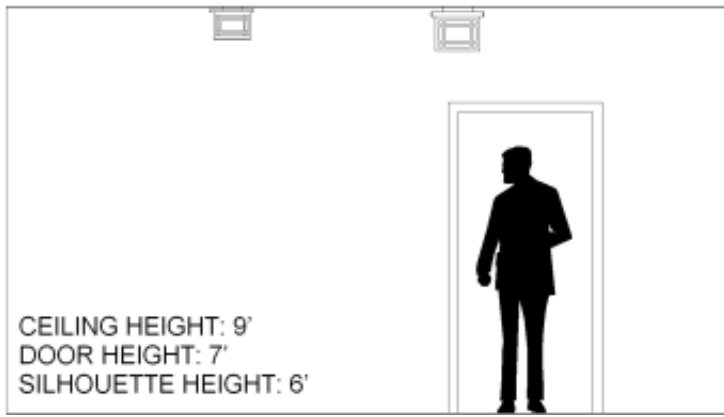

AG Premium Glass Diffuser

**Mountings**

CC Ceiling Canopy

**Louvers**

SQ Square Cell

**Dimming Types**

0 D1

**PRODUCT FEATURES**

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.