


Bismarck Series Ceiling Mount





Madal Number	Lamping	Dady Lamping	Circuit	Finish	Diffusor	Mounting	Laurer
Model Number	Lamping Code	Body Lamping	Circuit	FINISN	Diffuser	Mounting	Louver
BM1008C • W 12 • HT 10	GJT	4,800lm LED (27W)	1	PC	WA AG	СС	SQ
	AXP	2-100W A21 (200W)	1	PC	WA AG	CC	SQ
BM1309C • W 15 • HT 11	GJM	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	AXR	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
BM1410C • W 14 • HT 12	GJN	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	CWZ	3-100W A21 (300W)	1	PC	WA AG	СС	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Lamps


100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

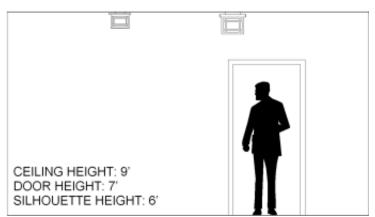

PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lampingHigh power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AG	Premium Glass Diffuser
Mountings	
CC	Ceiling Canopy
Louvers	
SQ	Square Cell

Dimming Types

D1