


Bismarck Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
BM1008C	GJT	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	• W 12 • HT 10						
	AXP	2-100W A21 (200W)	1	PC	WA AG	CC	SQ
BM1309C	GJM	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	• W 15 • HT 11						
	AXR	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
BM1410C	GJN	4,800lm LED (27W)	1	PC	WA AG	CC	SQ
	• W 14 • HT 12						
	CWZ	3-100W A21 (300W)	1	PC	WA AG	CC	SQ

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser

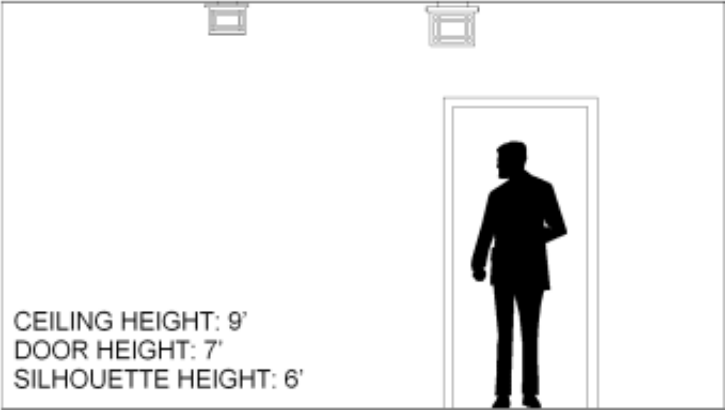

CEILING HEIGHT: 9'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

0 D1