


## Bismarck Series Pendant

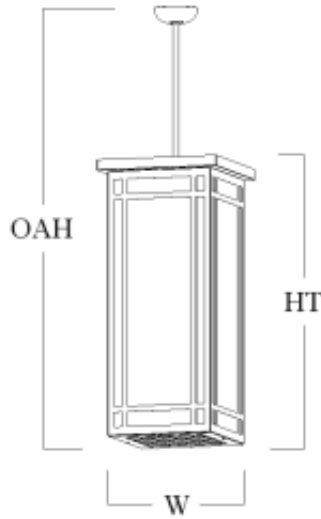


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louwer
<b>BM1024L</b>	FJE	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	AD AG	ST SP	SQ
<ul style="list-style-type: none"> <li>• W 12</li> <li>• HT 25</li> <li>• OAH 72 (OverAll Height)</li> </ul>								
<b>BM1326L</b>	GHI	15,600lm LED (88W)	7,100lm LED (47W)	2	PC	AD AG	ST SP	SQ
<ul style="list-style-type: none"> <li>• W 15</li> <li>• HT 27</li> <li>• OAH 96 (OverAll Height)</li> </ul>								
	GHP	19,800lm LED (124W)	12,500lm LED (85W)	2	PC	AD AG	ST SP	SQ
	FJF	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD AG	ST SP	SQ
<b>BM1331L</b>	GKY	15,600lm LED (88W)	7,100lm LED (47W)	2	PC	AD AG	ST SP	SQ
<ul style="list-style-type: none"> <li>• W 15</li> <li>• HT 32</li> <li>• OAH 96 (OverAll Height)</li> </ul>								
	DMR	24,000lm LED (150W)	12,500lm LED (85W)	2	PC	AD AG	ST SP	SQ
	FJG	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD AG	ST SP	SQ
<b>BM1436L</b>	DHH	21,500lm LED (132W)	12,500lm LED (85W)	2	PC	AD AG	ST SP	SQ
<ul style="list-style-type: none"> <li>• W 16</li> <li>• HT 37</li> <li>• OAH 96</li> </ul>								

(OverAll Height)	GEJ	30,900lm LED (194W)	12,500lm LED (85W)	2	PC	AD AG	ST SP	SQ
	FJH	9-60W A19 (540W)	1-100W PAR38 (100W)	3	PC	AD AG	ST SP	SQ
<b>BM1842L</b>	DNJ	39,200lm LED (256W)	12,500lm LED (85W)	2	PC	AD AG	ST SP	SQ
• W 21 • HT 44 • OAH 120 (OverAll Height)	FJI	12-MAX 45W LED Med. Base (540W)	1-100W A21 (100W)	2	PC	AD AG	ST SP	SQ

#### SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

#### Scale

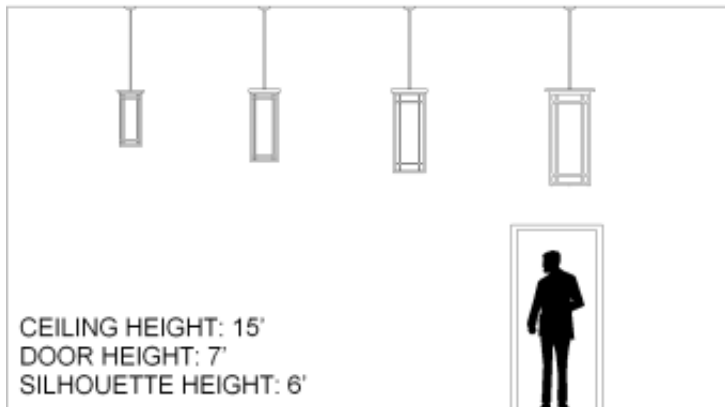

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

#### Lamps

60W A19	Medium Base, 60W Max, Incandescent or LED
100W PAR38	Medium Base, 100W Max, Incandescent or LED
MAX 45W LED Med. Base	45W-LED A21, medium base

#### Finish Types

PC	Powder Coat
----	-------------

#### Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

#### Mountings

ST	Stem
SP	Steep Pitch Canopy for Stem

#### Louvers

SQ	Square Cell
----	-------------

#### Dimming Types

0	D1
1	D2
2	D3