
## **Bismarck Series Short Pendant**





Model Number	Lamping Code	Body Lamping (	Circuit	Finish	Diffuser	Mounting	Louver
• W 12 • HT 9 • OAH 48 (OverAll Height)	GGV	4,800lm LED (14W)	1	PC	WA AG	ST SP	SQ
	AXL	2-100W A21 (200W)	1	PC	WA AG	ST SP	SQ
• W 15 • HT 10 • OAH 48 (OverAll Height)	GGW	4,800lm LED (27W)	1	PC	WA AG	ST SP	SQ
	AXN	3-100W A21 (300W)	1	PC	WA AG	ST SP	SQ
• W 14" • HT 10" • OAH 48" (OverAll Height)	GGX	4,800lm LED (27W)	1	PC	WA AG	ST SP	SQ
	CWX	3-150W A21 (450W)	1	PC	WA AG	ST SP	SQ
• W 26 • HT 8 • OAH 48 (OverAll Height)	GKX	9,700lm LED (58W)	1	PC	WA AG	ST SP	SQ
	GKW	15,800lm LED (116W)	1	PC	WA AG	ST SP	SQ

SAMPLE CATALOG NUMBER


Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Lamps

100W A21

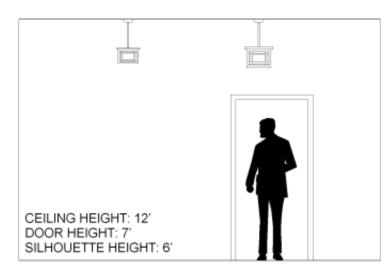

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- · Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

150W A21 Medium Base, 150W Max, Incandesent or LED

Finish Types

PC Powder Coat

**Diffuser Types** 

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

ST Stem

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

## **Dimming Types**

0 D1 1 D2