




Brookville Series Ceiling Mount

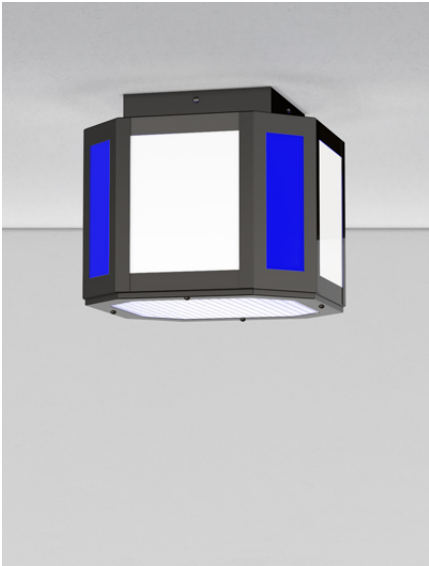

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver
BR1008C • W 10 • HT 10	GJO	4,800lm LED (27W)	1	PC	WA AG	DAC CDA	CC	SQ
	FMI	2-100W A21 (200W)	1	PC	WA AG	DAC CDA	CC	SQ
BR1309C • W 13" • HT 12"	GJP	4,800lm LED (27W)	1	PC	WA AG	DAC CDA	CC	SQ
	FML	3-100W A21 (300W)	1	PC	WA AG	DAC CDA	CC	SQ
BR1410C • W 14" • HT 13"	GJQ	4,800lm LED (27W)	1	PC	WA AG	DAC CDA	CC	SQ
	FMO	3-100W A21 (300W)	1	PC	WA AG	DAC CDA	CC	SQ

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser

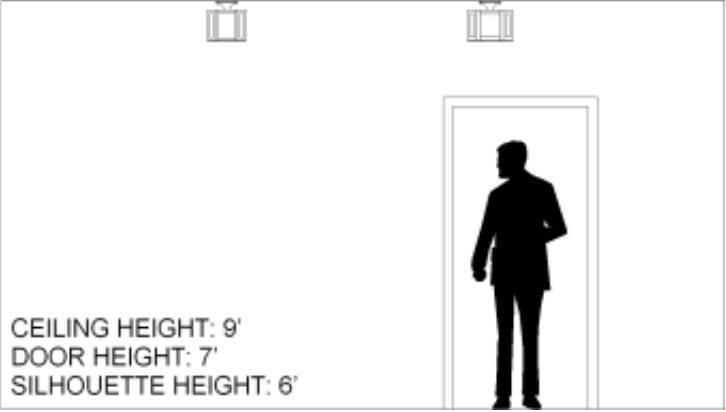

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AG Premium Glass Diffuser

Diffuser Accent Types

DAC Diffuser Accent Color
CDA Custom Diffuser Accent

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

0 D1