


Brookville Series Pendant



Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Options
BR1024L • W 10" • HT 24" • OAH 72" (OverAll Height)	FNB	4-100W A21 (400W)	1-100W PAR38 (100W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
BR1326L • W 13" • HT 26" • OAH 96" (OverAll Height)	FNK	15,400lm LED (97W)	7,100lm LED (51W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FNN	19,700lm LED (128W)	12,500lm LED (93W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FNH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
BR1331L • W 13" • HT 31" • OAH 96" (OverAll Height)	FNX	19,700lm LED (128W)	12,500lm LED (93W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FNY	24,000lm LED (150W)	12,500lm LED (93W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FNT	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
BR1436L • W 14" • HT 36" • OAH 96" (OverAll Height)	FOH	23,800lm LED (132W)	12,500lm LED (93W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FOK	31,400lm LED (176W)	12,500lm LED (93W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
	FOA	9-60W A19 (540W)	1-100W PAR38 (100W)	3	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO
BR1842L	FPB	39,400lm LED (229W)	12,500lm LED (93W)	2	PC	WA	DAC	ST	SQ	CUT

• W 18"						AG	CDA	CH SM SP		LOGO
• HT 42"										
• OAH 120" (OverAll Height)										
	FON	12-MAX 45W LED Med. Base (540W)	1-100W A21 (100W)	2	PC	WA AG	DAC CDA	ST CH SM SP	SQ	CUT LOGO

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

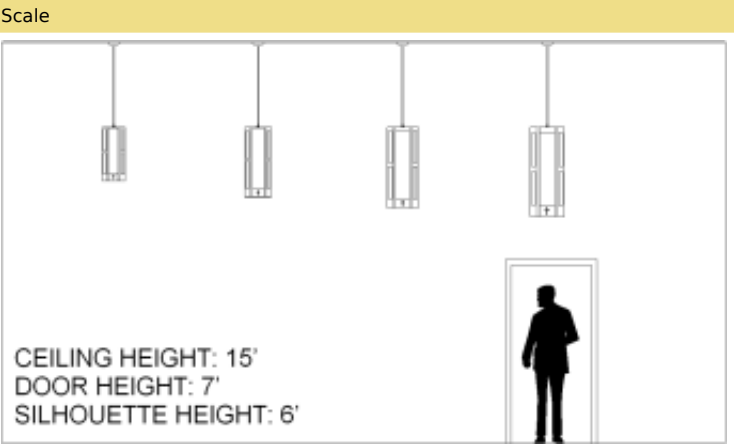

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key	
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
60W A19	Medium Base, 60W Max, Incandesent or LED
MAX 45W LED Med. Base	45W-LED A21, medium base
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Diffuser Accent Types	
DAC	Diffuser Accent Color
CDA	Custom Diffuser Accent
Mountings	
ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D3
2	D2
Options	
CUT	Cut-Out Symbol
LOGO	Custom Logo