



Brookville Series Wall Sconce

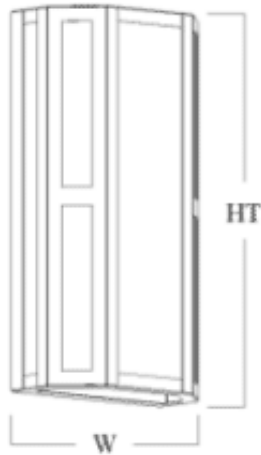

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Options
BR0816S • W 8" • HT 16" • EXT 4"	FQC	1,000lm LED (5W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FQD	2,200lm LED (14W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FPY	1-60W A19 (60W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
BR1020S • W 10" • HT 20" • EXT 5"	FQI	2,200lm LED (14W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FQH	3,800lm LED (22W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FQE	2-100W A21 (200W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
BR1326S • W 13" • HT 26" • EXT 6"	FQM	6,300lm LED (40W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FQL	8,200lm LED (53W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL
	FQJ	3-100W A21 (300W)	1	PC	WA AG	DAC CDA	WM	BD	CUT LOGO BL

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	60W A19 Medium Base, 60W Max, Incandesent or LED
	100W A21 Medium Base, 100W Max, Incandesent or LED
	Finish Types
	PC Powder Coat

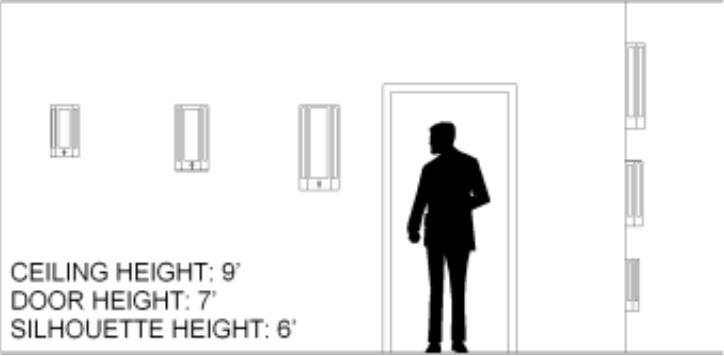

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Diffuser Accent Types

DAC	Diffuser Accent Color
CDA	Custom Diffuser Accent

Mountings

WM	Wall Mount
----	------------

Louvers

BD	Bottom Perf Door
----	------------------

Dimming Types

0	D1
---	----

Options

CUT	Cut-Out Symbol
LOGO	Custom Logo
BL	Bottom Lens
BD	Bottom Door