



# **Cambridge Series 2-Tier Large Pendant**





Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver
<b>CA2412W</b> • W 24 • HT 15	FYS	11,900lm LED(77W)		1	PC	WA AG	CDA	TC	SQ
• OAH 48 (OverAll Height)	GLI	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	CDA	TC	SQ
CA3014W  • W 30 • HT 17	FYT	17,300lm LED (116W)		1	PC	WA AG	CDA	TC	SQ
• OAH 72 (OverAll Height)	GLJ	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
• W 36 • HT 19	DVJ	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	CDA	TC	SQ
• OAH 96 (OverAll Height)	FWH	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
• W 42 • HT 22	DZT	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	CDA	TC	SQ
• OAH 96 (OverAll Height)	FWI	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
CA5422W  • W 54"  • HT 22"	DVL	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	CDA	TC	SQ
• OAH 120" (OverAll Height)	FWJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ

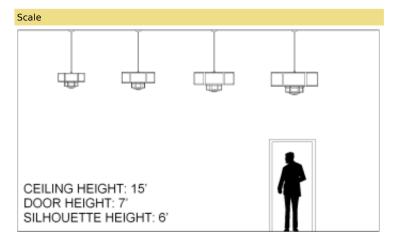

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

## Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED

## Finish Types

PC Powder Coat

## **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

## **Diffuser Accent Types**

CDA Custom Diffuser Accent

## Mountings

TC Triple Chain Spreader

### Louvers

SQ Square Cell

## **Dimming Types**

0 D1 1 D2 2 D3