


A large, ornate, gold-colored chandelier with a complex, multi-tiered design. It features a central column and multiple tiers of decorative elements, including a large, arched, and fluted structure. The chandelier is suspended by a chain and has a warm, glowing light emanating from within.

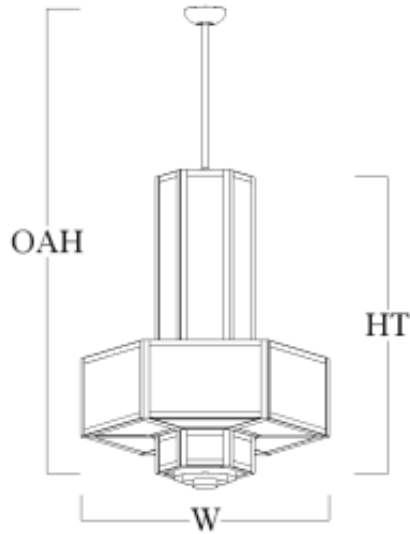

Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
CA3038H • W 30 • HT 40 • OAH 72 (OverAll Height)	GLG	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH TC SP	SQ
CA3642H • W 36 • HT 45 • OAH 96 (OverAll Height)	DVO	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH TC SP	SQ
	FWD	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH TC SP	SQ
CA4249H • W 42 • HT 54 • OAH 120 (OverAll Height)	EAU	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SP	SQ
	FWC	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH TC SP	SQ
CA4856H • W 48 • HT 60 • OAH 120 (OverAll Height)	ESP	25,700lm LED (159W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SP	SQ
	FWM	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH TC SP	SQ
CA5460H • W 54" • HT 60" • OAH 120" (OverAll Height)	FZD	27,800lm LED (132W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SP	SQ
	FWE	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH TC SP	SQ
CA6072H • W 60" • HT 72"	GLR	27,800lm LED (146W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SP	SQ

- OAH 120"
(OverAll Height)

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

CEILING HEIGHT: 15'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandesent or LED
100W R40/Par38	Medium Base, 100W Max, Incandesent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
TC	Triple Chain Spreader
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D3