


Cambridge Series Pendant

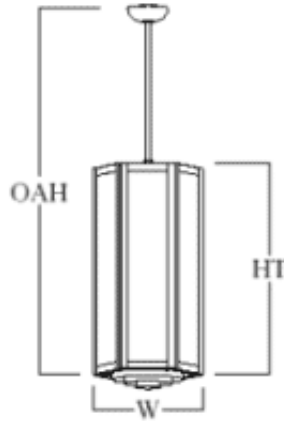


| Model Number | Lamping Code | Body Lamping | Down Lamping | Circuit | Finish | Diffuser | Mounting | Louwer |
|---|--------------|---------------------|---------------------|---------|--------|----------|----------|----------|
| CA1222L | AAD | 3-100W-A21 (300W) | 1-300W-R40 (300W) | 2 | PC | AD AG | ST TC | CR SQ |
| <ul style="list-style-type: none"> • W 12" • HT 25" • OAH 72" (OverAll Height) | | | | | | | | |
| CA1426L | DVG | 14,500lm LED (88W) | 5,000lm LED (33W) | 2 | PC | AD AG | ST TC | CR SQ |
| <ul style="list-style-type: none"> • W 14" • HT 29" • OAH 96" (OverAll Height) | | | | | | | | |
| | DFB | 14,500lm LED (88W) | 7,000lm LED (47W) | 2 | PC | AD AG | ST TC | CR SQ |
| | DTG | 14,500lm LED (88W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| | DFJ | 23,100lm LED (146W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| | DHI | 6-100W-A21 (600W) | 1-300W-R40 (300W) | 2 | PC | AD AG | ST TC | CR SQ |
| CA1631L | DFA | 14,500lm LED (88W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| <ul style="list-style-type: none"> • W 16" • HT 35" • OAH 96" (OverAll Height) | | | | | | | | |
| | DLX | 23,100lm LED (146W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| | DCR | 29,500lm LED (194W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| | DHJ | 6-100W-A21 (600W) | 1-300W-R40 (300W) | 2 | PC | AD AG | ST TC | CR SQ |

| | | | | | | | | |
|--|-----|---------------------|---------------------|---|----|----------|----------|----------|
| CA1836L | DDL | 23,500lm LED (131W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| <ul style="list-style-type: none"> • W 18" • HT 40" • OAH 120" (OverAll Height) | | | | | | | | |
| | DHK | 9-100W-A21 (900W) | 1-300W-R40 (300W) | 2 | PC | AD AG | ST TC | CR SQ |
| CA2242L | DNF | 32,300lm LED (197W) | 12,000lm LED (100W) | 2 | PC | AD AG | ST TC | CR SQ |
| <ul style="list-style-type: none"> • W 22" • HT 46" • OAH 120" (OverAll Height) | | | | | | | | |
| | FCC | 9-100W-A21 (900W) | 1-300W-R40 (300W) | 3 | PC | AD AG | ST TC | CR SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

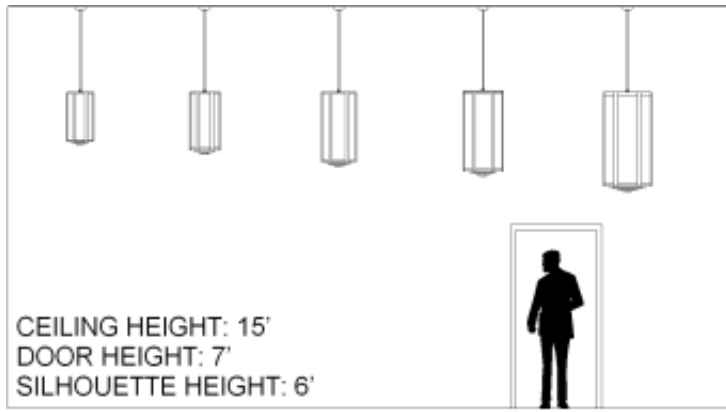

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

| | |
|-----|----------------|
| W | Width |
| HT | Height |
| OAH | OverAll Height |

Lamps

| | |
|----------|---|
| 100W-A21 | Medium Base, 100W Max, Incandesent or LED |
| 300W-R40 | 300W R40, medium base |

Finish Types

| | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

| | |
|----|---------------------------|
| AD | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser |

Mountings

| | |
|----|-----------------------|
| ST | Stem |
| TC | Triple Chain Spreader |

Louvers

| | |
|----|-----------------|
| CR | Concentric Ring |
| SQ | Square Cell |

Options

| | |
|----|---------------------------------------|
| D1 | LED 0-10V low voltage control dimming |
| D2 | LED Triac/ELV-phase dimming |