


Cleveland Series Pendant

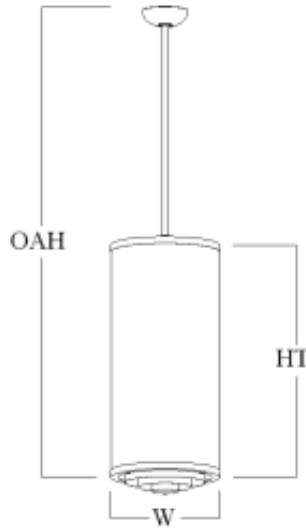


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	
CL1024L	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ	
	<ul style="list-style-type: none"> • W 10 • HT 24 • OAH 72 (OverAll Height) 								
CL1226L	DVD	14,500lm LED (86W)	5,100lm LED (33W)	2	PC	AD	ST CH SM SP	CR SQ	
	<ul style="list-style-type: none"> • W 15 • HT 26 • OAH 96 (OverAll Height) 								
	DNY	14,500lm LED (86W)	7,100lm LED (47W)	2	PC	AD	ST CH SM SP	CR SQ	
	DNZ	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ	
	DOB	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ	
CL1231L	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ	
	DOS	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ	
<ul style="list-style-type: none"> • W 15 • HT 31 • OAH 96 (OverAll Height) 									

DMF	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
DKO	29,500lm LED (192W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
FIZ	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

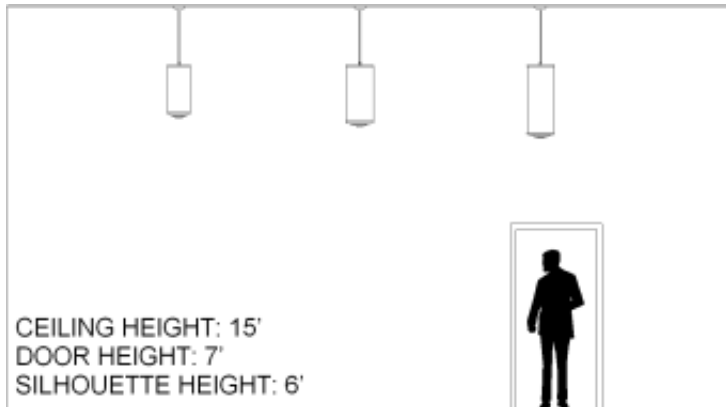

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- CR Concentric Ring
- SQ Square Cell

Dimming

- D1 LED 0-10v dimming options include integral 120-277v dimming drivers
- D2 LED Triac/ELV dimming options include integral 120v dimming drivers
- D31A LED 0-10v wireless dimming options include integral 120v dimming drivers and one wireless module
- D32A LED 0-10v wireless dimming options include integral 120v dimming drivers and two wireless modules