


Cleveland Series Short Pendant

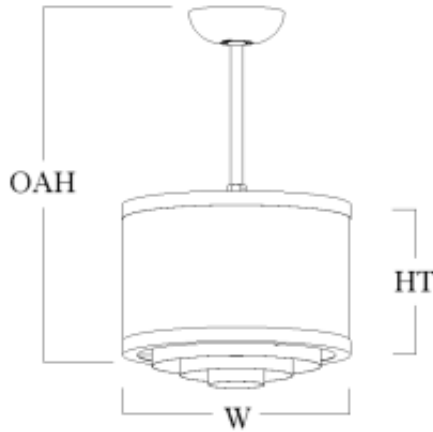


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
CL1007P	AHK	2-100W A21 (200W)	1	PC	AD	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> • W 12" • HT 7" • OAH 4' (OverAll Height) 							
CL1208P	FFE	2,600lm LED (22W)	1	PC	AD	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> • W 14" • HT 8" • OAH 4' (OverAll Height) 							
	AHM	3-100W A21 (300W)	1	PC	AD	ST CH SM SP	CR SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

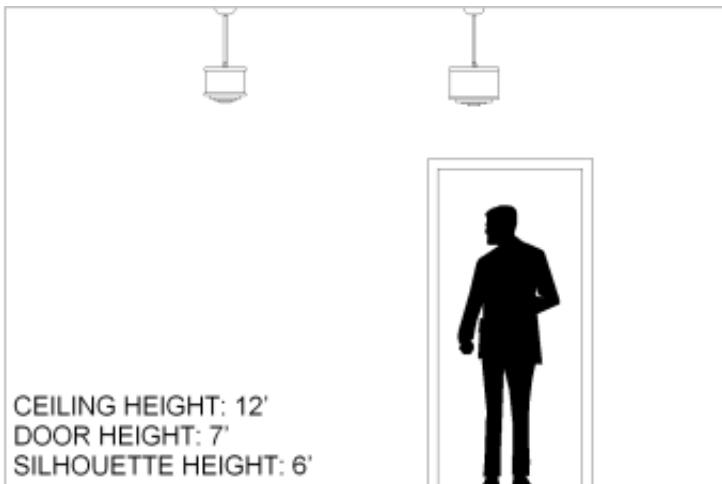

PRODUCT FEATURES

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
----------	---

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
----	---------------------------

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

D1	LED 0-10V low voltage control dimming
----	---------------------------------------