

## **Charleston Series 2-Tier Large Pendant**



Craft Metal Products Inc.



Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Options
CR2412W	FYS	11,900lm LED (77W)		1	PC	WA AG	CDA	тс	SQ	CUT LOGO
• W 24" • HT 12" • OAH 48" (OverAll Height)	GLI	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO
CR3014W	FYT	17,300lm LED (116W)		1	PC	WA AG	CDA	тс	SQ	CUT LOGO
• W 30" • HT 14" • OAH 72" (OverAll Height)	GLJ	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO
CR3616W	DVJ	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	CDA	TC	SQ	CUT LOGO
• W 36" • HT 16" • OAH 96" (OverAll Height)	FWH	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO
CR4218W	DZT	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO
<ul> <li>W 42"</li> <li>HT 18"</li> <li>OAH 96" (OverAll Height)</li> </ul>	FWI	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ	CUT LOGO
CR5422W	DVL	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO
• W 54" • HT 22" • OAH 120" (OverAll Height)	FWJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	тс	SQ	CUT LOGO

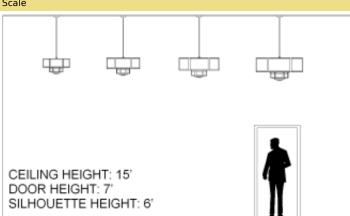

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- · Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W PAR38	Medium Base, 100W Max, Incandesent or LED

Finish Types		
PC	Powder Coat	
Diffuser Types		
WA	Standard Acrylic Diffuser	
AG	Premium Glass Diffuser	
Diffuser Accent	Types	
CDA	Custom Diffuser Accent	
Mountings		
ТС	Triple Chain Spreader	
Louvers		
SQ	Square Cell	
Dimming Types	;	
0	D2	
1	D1	
2	D3	
Options		
CUT	Cut-Out Symbol	

CUT	Cut-Out Symbol
LOGO	Custom Logo