


Charleston Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
CR0816B • W 8" • HT 16" • EXT 10"	DED	2,100lm LED (16W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
	ACK	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
CR1020B • W 10" • HT 20" • EXT 12"	DEE	3,100lm LED (22W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
	ACM	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
CR1224B • W 12" • HT 24" • EXT 14"	FEJ	4,500lm LED (33W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
	FEI	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
CR1426B • W 14" • HT 26" • EXT 16"	DEG	6,300lm LED (47W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN
	ACR	2-100W A21 (200W)	1	PC	WA AG	WM	SQ	CUT LOGO E BL CN

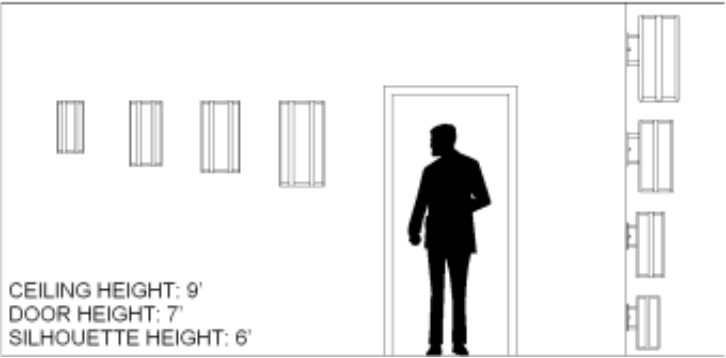

CEILING HEIGHT: 9'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps	
100W A21	Medium Base, 100W Max, Incandescent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
WM	Wall Mount
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D2
Options	
CUT	Cut-Out Symbol
LOGO	Custom Logo
E	Exterior
BL	Bottom Lens
CN	Cone Top (Exterior)