



Charleston Series Wall Sconce

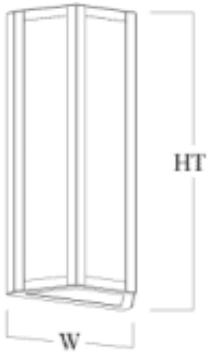

| Model Number                                                                                      | Lamping Code | Body Lamping      | Circuit | Finish | Diffuser | Mounting | Louver | Options     |
|---------------------------------------------------------------------------------------------------|--------------|-------------------|---------|--------|----------|----------|--------|-------------|
| CR0816S <ul style="list-style-type: none"><li>• W 8"</li><li>• HT 16"</li><li>• EXT 4"</li></ul>  | DYD          | 1,000lm LED (5W)  | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | DYE          | 2,200lm LED (14W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | ACB          | 1-60W A19 (60W)   | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
| CR1020S <ul style="list-style-type: none"><li>• W 10"</li><li>• HT 20"</li><li>• EXT 5"</li></ul> | DYF          | 2,200lm LED (14W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | DYG          | 3,800lm LED (22W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | ACD          | 2-100W A21 (200W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
| CR1224S <ul style="list-style-type: none"><li>• W 12"</li><li>• HT 24"</li><li>• EXT 6"</li></ul> | FEC          | 6,300lm LED (40W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | FED          | 7,100lm LED (44W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | FEB          | 3-100W A21 (300W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
| CR1426S <ul style="list-style-type: none"><li>• W 14"</li><li>• HT 26"</li><li>• EXT 7"</li></ul> | DDT          | 6,300lm LED (40W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | DYJ          | 8,200lm LED (53W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | GBM          | 4-60W A19 (240W)  | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |
|                                                                                                   | ACI          | 3-100W A21 (300W) | 1       | PC     | WA AG    | WM       | BD     | CUT LOGO BL |

Scale

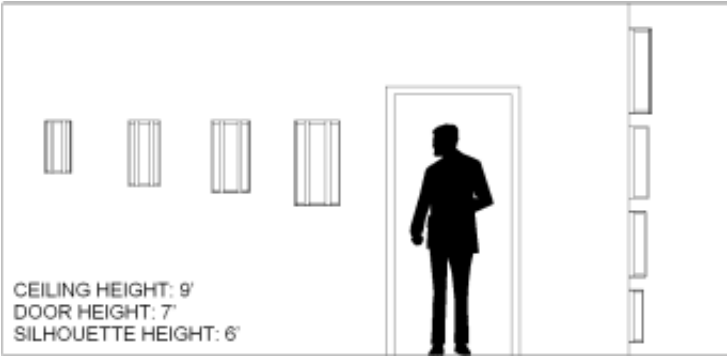

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

|          |                                            |
|----------|--------------------------------------------|
| 60W A19  | Medium Base, 60W Max, Incandescent or LED  |
| 100W A21 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

|    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

|    |            |
|----|------------|
| WM | Wall Mount |
|----|------------|

Louvers

|    |                  |
|----|------------------|
| BD | Bottom Perf Door |
|----|------------------|

Dimming Types

|   |    |
|---|----|
| 0 | D1 |
| 1 | D2 |

Options

|      |                |
|------|----------------|
| CUT  | Cut-Out Symbol |
| LOGO | Custom Logo    |
| BL   | Bottom Lens    |
| BD   | Bottom Door    |