

Corvallis Series Wall Bracket




Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
CV0816B	ATE	1-100W A21 (100W)	1	PC	AD	WM	CR SQ	BL
<ul style="list-style-type: none"> • W 8 • HT 17 • EXT 12 								
CV1020B	ATG	1-100W A21 (100W)	1	PC	AD	WM	CR SQ	BL
<ul style="list-style-type: none"> • W 10 • HT 21 • EXT 14 								
CV1224B	GBY	2-100W A21 (200W)	1	PC	AD	WM	CR SQ	BL
<ul style="list-style-type: none"> • W 12 • HT 25 • EXT 17 								

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

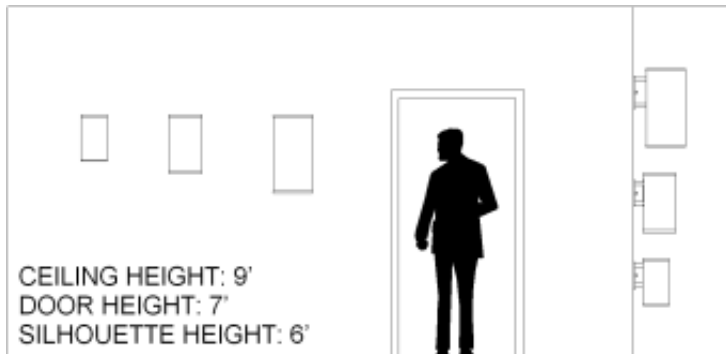

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandescent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

Mountings

WM Wall Mount

- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard electrical junction box (by others)
- LED Battery Back-Up Available
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

BL	Bottom Lens
----	-------------