


Corvallis Series Wall Sconce

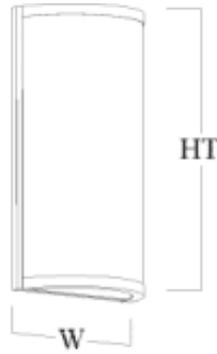


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
CV0816S • W 8 • HT 17 • EXT 5	DYX	1,000lm LED (7W)	1	PC	WA	WM	BD	BL
	DYY	1,800lm LED (14W)	1	PC	WA	WM	BD	BL
	ASX	1-60W A19 (60W)	1	PC	WA	WM	BD	BL
CV1020S • W 10 • HT 21 • EXT 6	DYZ	1,800lm LED (14W)	1	PC	WA	WM	BD	BL
	DZA	3,100lm LED (22W)	1	PC	WA	WM	BD	BL
	ASZ	2-100W A21 (200W)	1	PC	WA	WM	BD	BL
CV1224S • W 12 • HT 25 • EXT 7	DZB	6,300lm LED (40W)	1	PC	WA	WM	BD	BL
	FEH	7,100lm LED (44W)	1	PC	WA	WM	BD	BL
	ATC	3-100W A21 (300W)	1	PC	WA	WM	BD	BL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

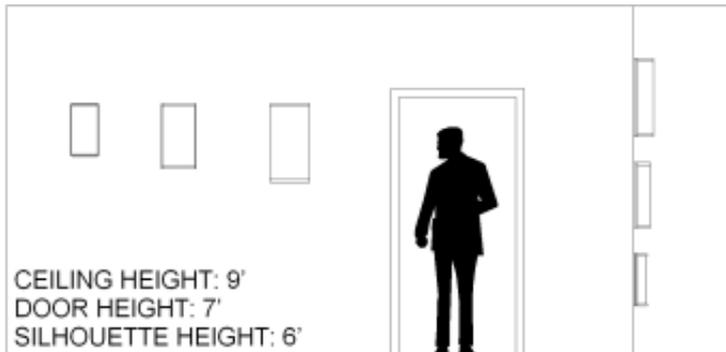

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandescent or LED
100W A21 Medium Base, 100W Max, Incandescent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- WA Standard Acrylic Diffuser

Mountings

- WM Wall Mount

- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers

BD	Bottom Perf Door
----	------------------

Dimming Types

0	D1
1	D2

Options

BL	Bottom Lens
BD	Bottom Door