

# **Dover Series 2-Tier Large Pendant**





Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver
<b>DV2412W</b> • W 24" • HT 12"	FYS	11,900lm LED(77W)		1	PC	WA AG	CDA	TC	SQ
• OAH 48" (OverAll Height)	GLI	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	CDA	TC	SQ
<b>DV3014W</b> • W 30" • HT 14"	FYT	17,300lm LED (116W)		1	PC	WA AG	CDA	TC	SQ
• OAH 72" (OverAll Height)	GLJ	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
<b>DV3616W</b> • W 36" • HT 16"	DVJ	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	CDA	TC	SQ
• OAH 96" (OverAll Height)	FWH	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
• W 42" • HT 18"	DZT	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	CDA	ТС	SQ
• OAH 96" (OverAll Height)	FWI	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	TC	SQ
<b>DV5422W</b> • W 54" • HT 22"	DVL	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	CDA	тс	SQ
• OAH 120" (OverAll Height)	FWJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	CDA	тс	SQ

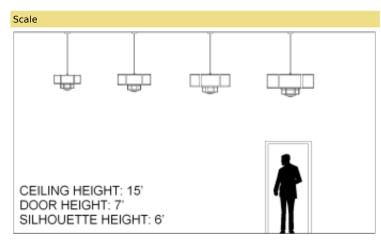

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer
- manufacturer for compatibility. • Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- · Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- · For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- · Contact Us for more lamping options.

## Abbreviation Key Lamps 60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED **Finish Types** PC Powder Coat

Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

### **Diffuser Accent Types**

CDA **Custom Diffuser Accent** 

#### Mountings

ΤС Triple Chain Spreader

## Louvers

SQ Square Cell

Dimmin	g Types		
0	D1		
1	D2		
2	D3		