


Dover Series 3-Tier Large Pendant






| Model Number | Lamping Code | Body Lamping | Gallery Lamping | Down Lamping | Circuit | Finish | Diffuser | Mounting | Louver |
|--|-----------------|---------------------|---------------------|-------------------------|---------|--------|----------|----------------|--------|
| • W 30 • HT 43 • OAH 72 (OverAll Height) | GLG | 4-60W A19 (240W) | 6-60W A19 (360W) | 1-100W R40/Par38 (100W) | 2 | PC | WA AG | ST CH SP | SQ |
| • W 36 • HT 46 • OAH 96 (OverAll Height) | DVO | 15,300lm LED (87W) | 32,600lm LED (216W) | 7,100lm LED (51W) | 2 | PC | WA AG | ST CH SP | SQ |
| | FWD | 6-100W A21 (600W) | 6-100W A21 (600W) | 1-100W R40/Par38 (100W) | 3 | PC | WA AG | ST CH SP | SQ |
| • W 42 • HT 55 • OAH 120 (OverAll Height) | EAU | 15,300lm LED (87W) | 32,600lm LED (216W) | 12,500lm LED (93W) | 2 | PC | WA AG | ST CH SP | SQ |
| | FWC | 6-100W A21 (600W) | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3 | PC | WA AG | ST CH SP | SQ |
| • W 48 • HT 64 • OAH 120 (OverAll Height) | ESP | 25,700lm LED (159W) | 32,600lm LED (216W) | 12,500lm LED (93W) | 2 | PC | WA AG | ST CH SP | SQ |
| | FWM | 6-100W A21 (600W) | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3 | PC | WA AG | ST CH SP | SQ |
| • W 54" • HT 60" • OAH 120" (OverAll Height) | FZD | 27,800lm LED (132W) | 37,600lm LED (260W) | 12,500lm LED (93W) | 2 | PC | WA AG | ST CH SP | SQ |
| | FWE | 6-100W A21 (600W) | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3 | PC | WA AG | ST CH SP | SQ |
| • W 60" • HT 72" | GLR | 27,800lm LED (146W) | 37,600lm LED (260W) | 12,500lm LED (93W) | 2 | PC | WA AG | ST CH SP | SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

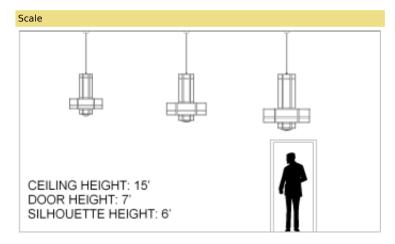

PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down
- Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- · Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W

R40/Par38

Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

WA Standard Acrylic Diffuser AG Premium Glass Diffuser

Mountings

ST Stem Chain CH

SP Steep Pitch Canopy for Stem

Louvers

Square Cell SQ

Dimming Types

0 D1

D3 1