



## Dover Series Pendant

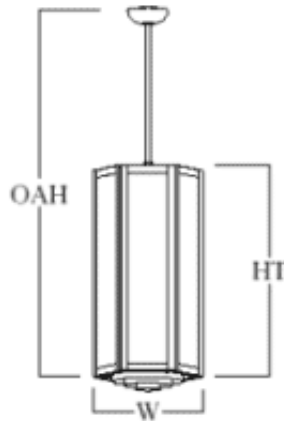

SAMPLE CATALOG NUMBER  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options											Dimensions		
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	W	HT	OAH	
DV1222L	AAD	3-100W-A21 (300W)	1-300W-R40 (300W)	120	2	PC	CR SQ	CH SS	AD AG		W	12"	HT 27"	OAH 72"
DV1426L	DFB	14,500lm LED (96W)	7,000lm LED (53W)	120/277	2	PC	CR	CH	AD	D10	W	14"	HT	32"
	DVG	14,500lm LED (96W)	5,000lm LED (38W)	120/277	2		SQ	SS	AG		OAH	96"		
	DTG	14,500lm LED (96W)	12,000lm LED (100W)	120/277	2									
	DFJ	23,100lm LED (159W)	12,000lm LED (100W)	120/277	2									
	DHI	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2									
DV1631L	DFA	14,500lm LED (96W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	D10	W	16"	HT	38"
	DLX	23,100lm LED (159W)	12,000lm LED (100W)	120/277	2		SQ	SS	AG		OAH	96"		
	DCR	29,500lm LED (213W)	12,000lm LED (100W)	120/277	2									
	DHJ	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2									
DV1836L	DDL	23,500lm LED (144W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	D10	W	18"	HT	44"
	DNS	37,400lm LED (238W)	12,000lm LED (100W)	120/277	2		SQ	SS	AG		OAH	120"		
	DHK	9-100W-A21 (900W)	1-300W-R40 (300W)	120	2									
DV2242L	DNF	32,300lm LED (216W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	D10	W	22"	HT	50"
	DHL	12-100W-A21 (1200W)	1-300W-R40 (300W)	120	3		SQ	SS	AG		OAH	120"		

### Scale

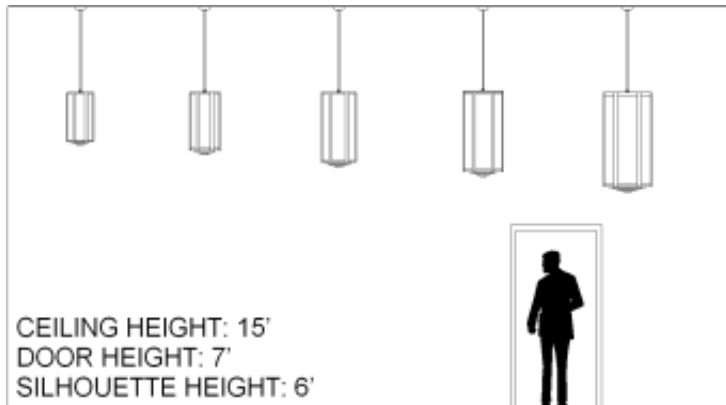

### Abbreviation Key

#### Dimensions

W	Width
HT	Height
OAH	OverAll Height

#### Lamp Descriptions

100W-A21	Medium Base, 100W Max, Incandescent or LED
300W-R40	300W R40, medium base
LED	3000 Kelvin Warm White LED

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Finish Types

PC	Powder Coat
----	-------------

## Hanging Style

SS	SINGLE STEM
----	-------------

CH	CHAIN
----	-------

## Diffuser Types

AD	Acrylic (White Acrylic Standard)
----	----------------------------------

AG	Art Glass
----	-----------

## Options

D10	0-10V low voltage control dimming
-----	-----------------------------------

## Louver

CR	CONCENTRIC RING (Not available on LED lamping)
----	------------------------------------------------

SQ	SQUARE CELL (Must be used on all LED lamping)
----	-----------------------------------------------