



Easton Series 3-Arm Cluster Pendant

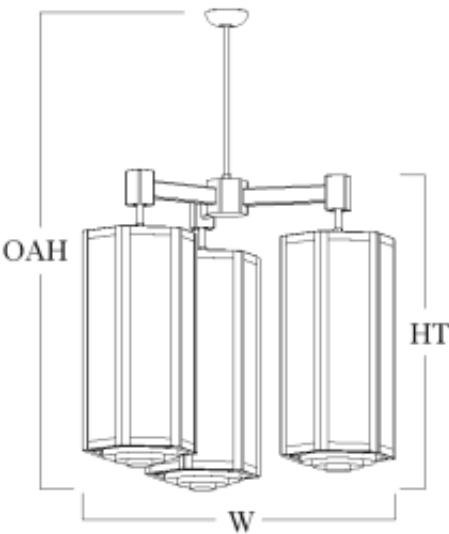

| Model Number                                                                                                                              | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louver |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|
| EA2724U <ul style="list-style-type: none"><li>• W 37</li><li>• HT 33</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 12"x27"</li></ul>  | GCB          | 12-60W A19 (720W)   | 3-100W A19 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| EA3026U <ul style="list-style-type: none"><li>• W 42</li><li>• HT 35</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 14"x29"</li></ul>  | DQK          | 43,600lm LED (258W) | 21,400lm LED (152W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DQM          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | FKW          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| EA3931U <ul style="list-style-type: none"><li>• W 53</li><li>• HT 40</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 16"x35"</li></ul> | DQN          | 43,600lm LED (258W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DQO          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DQP          | 88,700lm LED (575W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | FKX          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| EA4836U                                                                                                                                   | GAB          | 53,600lm LED (298W) | 15,500lm LED (108W) | 2       | PC     | WA AG    | ST SP    | SQ     |
| <ul style="list-style-type: none"><li>• W 63</li><li>• HT 45</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 18"x40"</li></ul>         |              |                     |                     |         |        |          |          |        |

|     |                      |                     |   |    |          |          |    |
|-----|----------------------|---------------------|---|----|----------|----------|----|
| GAC | 53,600lm LED (298W)  | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FYV | 74,800lm LED (436W)  | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FYW | 105,900lm LED (713W) | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FKY | 27-60W A19 (1620W)   | 3-100W A21 (300W)   | 3 | PC | WA<br>AG | ST<br>SP | SQ |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

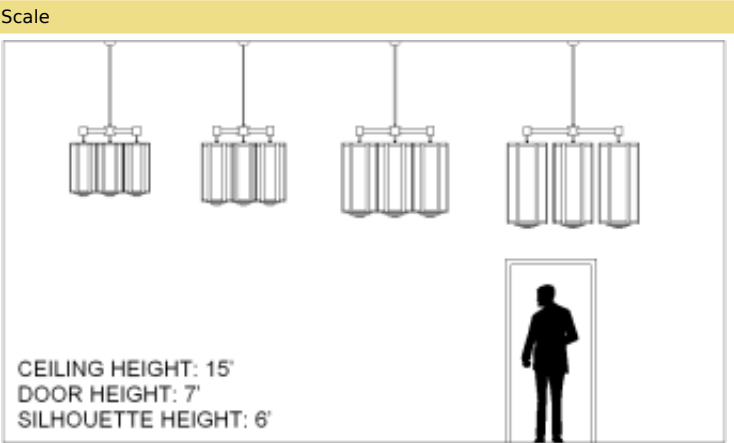

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

|          |                                            |
|----------|--------------------------------------------|
| 60W A19  | Medium Base, 60W Max, Incandescent or LED  |
| 100W A19 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

|    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

|    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

|    |                             |
|----|-----------------------------|
| ST | Stem                        |
| SP | Steep Pitch Canopy for Stem |

Louvers

|    |             |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

|   |    |
|---|----|
| 0 | D3 |
| 1 | D1 |
| 2 | D2 |