


Easton Series 3-Arm Cluster Pendant

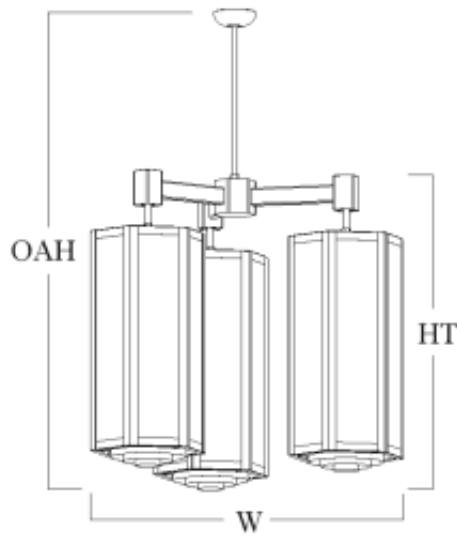


| Model Number | Lamping Code | Body Lamping | Down Lamping | Circuit | Finish | Diffuser | Mounting | Louver |
|--|--------------|---------------------|---------------------|---------|--------|----------|----------|----------|
| EA2724U | FKV | 9-100W A21 (900W) | 3-100W A21 (300W) | 2 | PC | AD AG | ST SP | CR SQ |
| <ul style="list-style-type: none"> • W 38 • HT 32 • OAH 96 (OverAll Height) • Y 3 @ 12"x27" | | | | | | | | |
| EA3026U | DQK | 44,100lm LED (262W) | 21,000lm LED (139W) | 2 | PC | AD AG | ST SP | CR SQ |
| <ul style="list-style-type: none"> • W 42 • HT 37 • OAH 120 (OverAll Height) • X 3 @ 14"x29" | | | | | | | | |
| | DQM | 70,100lm LED (436W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| | FKW | 18-60W A19 (1080W) | 3-100W A21 (300W) | 2 | PC | AD AG | ST SP | CR SQ |
| EA3931U | DQN | 43,600lm LED (262W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| <ul style="list-style-type: none"> • W 53 • HT 42 • OAH 120 (OverAll Height) • X 3 @ 16"x35" | | | | | | | | |
| | DQO | 70,100lm LED (436W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| | DQP | 89,500lm LED (581W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| | FKX | 18-60W A19 (1080W) | 3-100W A21 (300W) | 2 | PC | AD AG | ST SP | CR SQ |
| EA4836U | DQQ | 70,700lm LED (393W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| <ul style="list-style-type: none"> • W 64 • HT 48 • OAH 120 (OverAll Height) • X 3 @ 18"x40" | | | | | | | | |

| | | | | | | | |
|-----|---------------------|---------------------|---|----|----------|----------|----------|
| DQR | 94,300lm LED (523W) | 36,000lm LED (298W) | 2 | PC | AD AG | ST SP | CR SQ |
| FKY | 27-60W A19 (1620W) | 3-100W A21 (300W) | 3 | PC | AD AG | ST SP | CR SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

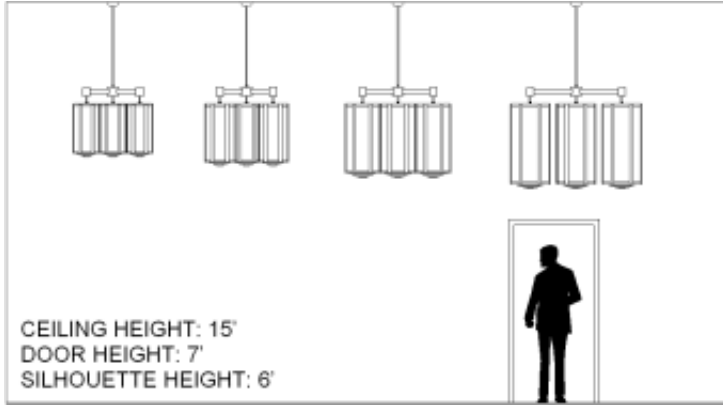

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

| | |
|-----|----------------|
| W | Width |
| HT | Height |
| OAH | OverAll Height |
| Y | Y-Dimension |
| X | X-Dimension |

Lamps

| | |
|----------|---|
| 100W A21 | Medium Base, 100W Max, Incandesent or LED |
| 60W A19 | Medium Base, 60W Max, Incandesent or LED |

Finish Types

| | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

| | |
|----|---------------------------|
| AD | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser |

Mountings

| | |
|----|-----------------------------|
| ST | Stem |
| SP | Steep Pitch Canopy for Stem |

Louvers

| | |
|----|-----------------|
| CR | Concentric Ring |
| SQ | Square Cell |

Dimming

| | |
|---|----|
| 0 | D1 |
|---|----|