


## Easton Series 3-Arm Cluster Pendant

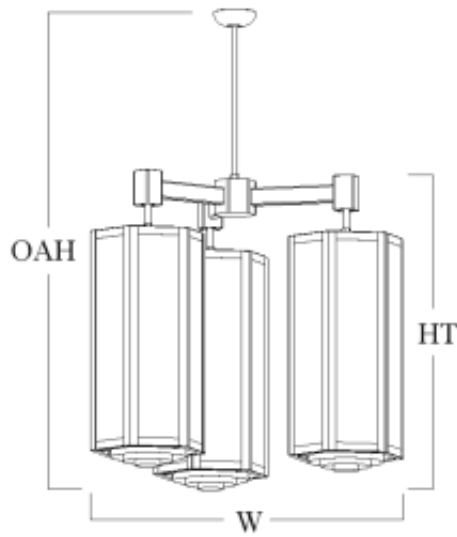


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
<b>EA2724U</b>	FKV	9-100W A21 (900W)	3-100W A21 (300W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> <li>• W 38</li> <li>• HT 32</li> <li>• OAH 96 (OverAll Height)</li> <li>• Y 3 @ 12"x27"</li> </ul>								
<b>EA3026U</b>	DQK	44,100lm LED (262W)	21,000lm LED (139W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> <li>• W 42</li> <li>• HT 37</li> <li>• OAH 120 (OverAll Height)</li> <li>• X 3 @ 14"x29"</li> </ul>								
	DQM	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	FKW	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	AD AG	ST SP	CR SQ
<b>EA3931U</b>	DQN	43,600lm LED (262W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> <li>• W 53</li> <li>• HT 42</li> <li>• OAH 120 (OverAll Height)</li> <li>• X 3 @ 16"x35"</li> </ul>								
	DQO	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	DQP	89,500lm LED (581W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	FKX	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	AD AG	ST SP	CR SQ
<b>EA4836U</b>	DQQ	70,700lm LED (393W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> <li>• W 64</li> <li>• HT 48</li> <li>• OAH 120 (OverAll Height)</li> <li>• X 3 @ 18"x40"</li> </ul>								

DQR	94,300lm LED (523W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
FKY	27-60W A19 (1620W)	3-100W A21 (300W)	3	PC	AD AG	ST SP	CR SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

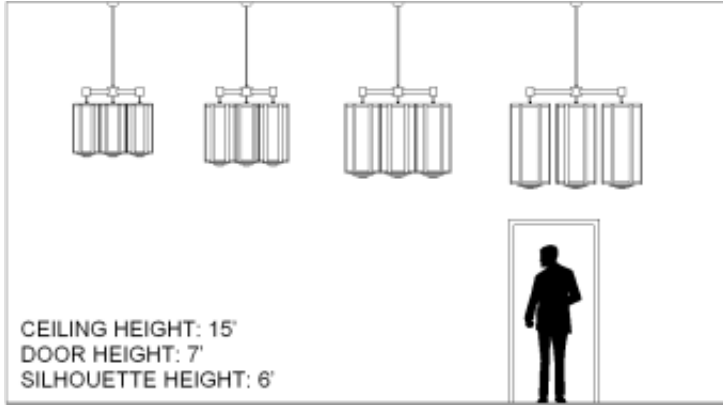

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height
Y	Y-Dimension
X	X-Dimension

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
60W A19	Medium Base, 60W Max, Incandesent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Dimming

0	D1
---	----