



Gainesville Series 2-Tier Large Pendant

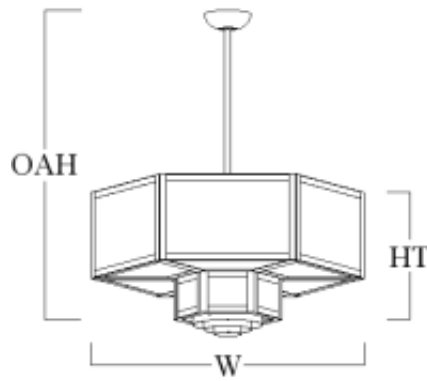

Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
GV2412W	ANY	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	AD AG	TC	CR SQ
<ul style="list-style-type: none"> • W 24 • HT 16 • OAH 48 (OverAll Height) 								
GV3014W	AOA	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	AD AG	TC	CR SQ
<ul style="list-style-type: none"> • W 30 • HT 19 • OAH 72 (OverAll Height) 								
GV3616W	DWC	35,200lm LED (198W)	7,100lm LED (47W)	2	PC	AD AG	TC	CR SQ
<ul style="list-style-type: none"> • W 36 • HT 22 • OAH 96 (OverAll Height) 								
	DJP	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	AD AG	TC	CR SQ
GV4218W	DWF	35,200lm LED (198W)	12,500lm LED (85W)	2	PC	AD AG	TC	CR SQ
<ul style="list-style-type: none"> • W 42 • HT 25 • OAH 96 (OverAll Height) 								
	DJQ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	AD AG	TC	CR SQ
GV5422W	EYJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	AD AG	TC	CR SQ
<ul style="list-style-type: none"> • W 54 • HT 30 • OAH 120 (OverAll Height) 								
	EYG	42,200lm LED (238W)	12,500lm LED (85W)	2	PC	AD AG	TC	CR SQ

Scale

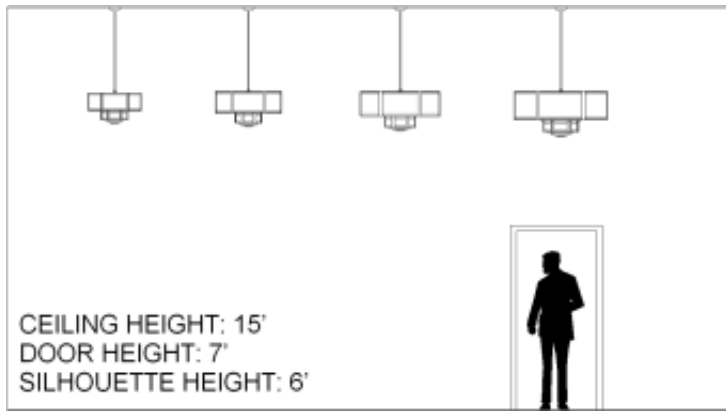

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for two circuit operation (Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 100W R40/Par38 300W R40, medium base
- 100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- AD Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- TC Triple Chain Spreader

Louvers

- CR Concentric Ring
- SQ Square Cell

Dimming

- D1 LED 0-10v dimming options include integral 120-277v dimming drivers