


Gainesville Series Pendant

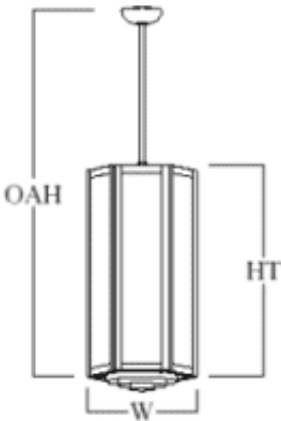

| Model Number                                                            | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting             | Louver |
|-------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------------------|--------|
| <b>GV1224L</b><br><br>• W 12<br>• HT 30<br>• OAH 72<br>(OverAll Height) | GEL          | 4-60W A19 (240W)    | 1-100W PAR38 (100W) | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>GV1426L</b><br><br>• W 14<br>• HT 32<br>• OAH 96<br>(OverAll Height) | DNT          | 14,500lm LED (86W)  | 7,100lm LED (51W)   | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | DNU          | 14,500lm LED (86W)  | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | DNW          | 23,100lm LED (146W) | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | FIP          | 6-60W A19 (360W)    | 1-100W PAR38 (100W) | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>GV1631L</b><br><br>• W 16<br>• HT 39<br>• OAH 96<br>(OverAll Height) | DOU          | 14,500lm LED (86W)  | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | DMB          | 23,100lm LED (146W) | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | DGD          | 29,500lm LED (192W) | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
|                                                                         | FLP          | 6-60W A19 (360W)    | 1-100W PAR38 (100W) | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |
| <b>GV1836L</b><br><br>• W 18<br>• HT 45                                 | FZV          | 24,900lm LED (146W) | 12,500lm LED (93W)  | 2       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     |

|                                                                                                                              |     |                     |                     |   |    |          |                      |    |
|------------------------------------------------------------------------------------------------------------------------------|-----|---------------------|---------------------|---|----|----------|----------------------|----|
| <ul style="list-style-type: none"> <li>• OAH 120 (OverAll Height)</li> </ul>                                                 | FZW | 35,300lm LED (238W) | 12,500lm LED (93W)  | 2 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |
|                                                                                                                              | FIS | 9-60W A19 (540W)    | 1-100W PAR38 (100W) | 2 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |
| <b>GV2242L</b> <ul style="list-style-type: none"> <li>• W 22</li> <li>• HT 52</li> <li>• OAH 120 (OverAll Height)</li> </ul> | GLA | 31,000lm LED (185W) | 12,500lm LED (93W)  | 2 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |
|                                                                                                                              | FIU | 9-60W A19 (540W)    | 1-100W PAR38 (100W) | 2 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

Scale

CEILING HEIGHT: 15'  
DOOR HEIGHT: 7'  
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 60W A19            Medium Base, 60W Max, Incandesent or LED
- 100W PAR38      Medium Base, 100W Max, Incandesent or LED

Finish Types

- PC                    Powder Coat

Diffuser Types

- WA                    Standard Acrylic Diffuser
- AG                    Premium Glass Diffuser

Mountings

- ST                    Stem
- CH                    Chain
- SM                    Surface Mount Chain
- SP                    Steep Pitch Canopy for Stem

Louvers

- SQ                    Square Cell

Dimming Types

- 0                      D1
- 1                      D2
- 2                      D3