


SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

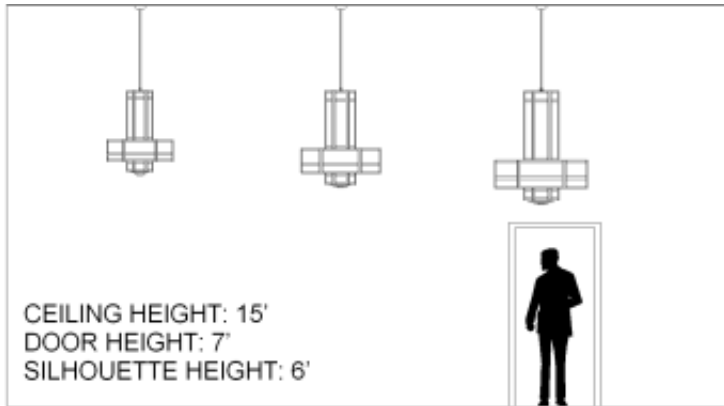

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandescent or LED
100W R40/Par38	Medium Base, 100W Max, Incandescent or LED

Finish Types

PC	Powder Coat
----	-------------

Finish Accent Types

WT	Wood Trim
CT	Custom Trim

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D3

Options

SIL	Silhouette Symbol
LOGO	Custom Logo