


Hampton Series 3-Tier Large Pendant

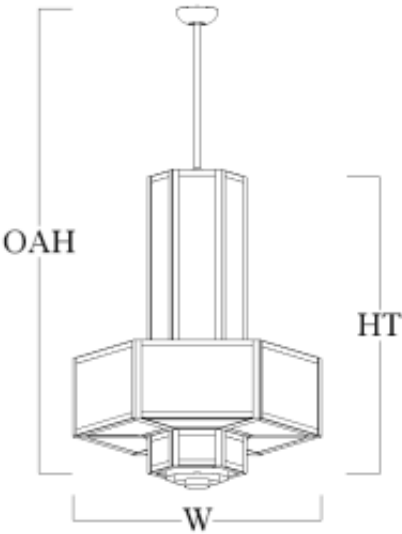


Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA3038H • W 32 • HT 38 • OAH 72 (OverAll Height)	GLG	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA3642H • W 38 • HT 40 • OAH 96 (OverAll Height)	DVO	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWD	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA4249H • W 44 • HT 48 • OAH 120 (OverAll Height)	EAU	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWC	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA4856H • W 50 • HT 56 • OAH 120 (OverAll Height)	ESP	25,700lm LED (159W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWM	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA5460H • W 54" • HT 60" • OAH 120" (OverAll Height)	FZD	27,800lm LED (132W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
	FWE	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO
HA6072H • W 60" • HT 72" • OAH 120" (OverAll Height)	GLR	27,800lm LED (146W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

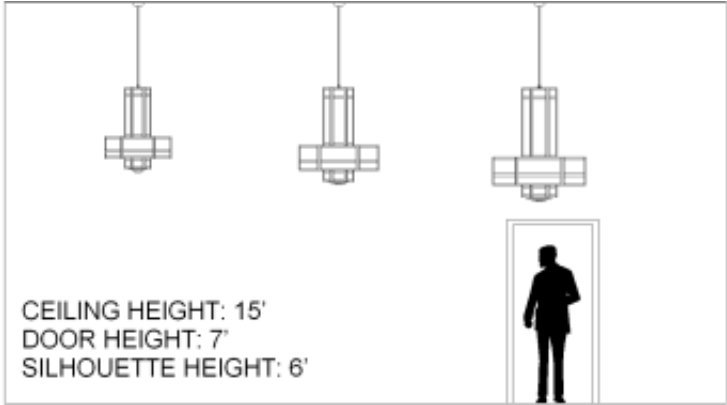

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- | | |
|----------------|--|
| 60W A19 | Medium Base, 60W Max, Incandescent or LED |
| 100W R40/Par38 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

- | | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Finish Accent Types

- | | |
|----|-------------|
| WT | Wood Trim |
| CT | Custom Trim |

Diffuser Types

- | | |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser |

Mountings

- | | |
|----|-----------------------------|
| ST | Stem |
| CH | Chain |
| SP | Steep Pitch Canopy for Stem |

Louvers

- | | |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

- | | |
|---|----|
| 0 | D1 |
| 1 | D3 |

Options

- | | |
|------|-------------------|
| SIL | Silhouette Symbol |
| LOGO | Custom Logo |