


Hampton Series 6-Arm Satellite Pendant

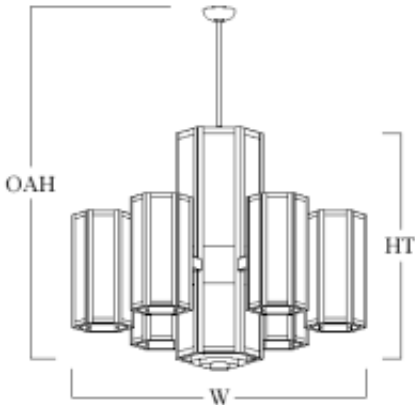

| Model Number                                                                                                                                         | Lamping Code | Body Lamping      | Satellite Lamping | Down Lamping          | Circuit | Finish | Finish Accent | Diffuser | Mounting | Louver | Options  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|-------------------|-----------------------|---------|--------|---------------|----------|----------|--------|----------|
| HA4836A                                                                                                                                              | EIB          | 5-60W A19 (300W)  | 12-60W A19 (720W) | 1-26W PAR38 LED (26W) | 3       | PC     | WT CT         | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <div><div>• W 50</div><div>• HT 36</div><div>• OAH 96</div><div>(OverAll Height)</div><div>• X 1 @ 16"x36"</div><div>• Y 6 @ 12"x20"</div></div>     |              |                   |                   |                       |         |        |               |          |          |        |          |
| HA6045A                                                                                                                                              | EIC          | 9-60W A19 (540W)  | 12-60W A19 (720W) | 1-26W PAR38 LED (26W) | 3       | PC     | WT CT         | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <div><div>• W 60"</div><div>• HT 45"</div><div>• OAH 120"</div><div>(OverAll Height)</div><div>• X 1 @ 16"x45"</div><div>• Y 6 @ 12"x24"</div></div> |              |                   |                   |                       |         |        |               |          |          |        |          |
| HA7254A                                                                                                                                              | EID          | 12-60W A19 (720W) | 12-60W A19 (720W) | 1-26W PAR38 LED (26W) | 3       | PC     | WT CT         | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <div><div>• W 72"</div><div>• HT 54"</div><div>• OAH 120"</div><div>(OverAll Height)</div><div>• X 1 @ 18"x54"</div><div>• Y 6 @ 14"x26"</div></div> |              |                   |                   |                       |         |        |               |          |          |        |          |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

|               |                                          |
|---------------|------------------------------------------|
| Scale         | Abbreviation Key                         |
| Lamps         |                                          |
| 60W A19       | Medium Base, 60W Max, Incandesent or LED |
| 26W PAR38 LED | Medium Base, 26W Max, LED                |



PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Down Lamping and Satellite Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| Finish Types        |                             |
|---------------------|-----------------------------|
| PC                  | Powder Coat                 |
| Finish Accent Types |                             |
| WT                  | Wood Trim                   |
| CT                  | Custom Trim                 |
| Diffuser Types      |                             |
| WA                  | Standard Acrylic Diffuser   |
| AG                  | Premium Glass Diffuser      |
| Mountings           |                             |
| ST                  | Stem                        |
| CH                  | Chain                       |
| SP                  | Steep Pitch Canopy for Stem |
| Louvers             |                             |
| SQ                  | Square Cell                 |
| Options             |                             |
| SIL                 | Silhouette Symbol           |
| LOGO                | Custom Logo                 |