


Hampton Series Pendant

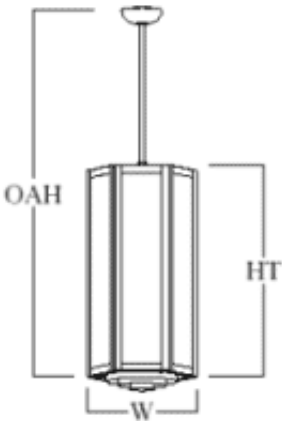


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA1224L • W 14 • HT 24 • OAH 72 (OverAll Height)	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1426L • W 16 • HT 26 • OAH 96 (OverAll Height)	DVG	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFB	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DTG	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	EOB	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFJ	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1631L • W 18 • HT 31 • OAH 96 (OverAll Height)	DFA	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DLX	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DCR	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT	WA	ST	SQ	SIL

						CT	AG	CH SM SP		LOGO
HA1836L • W 20 • HT 36 • OAH 120 (OverAll Height)	FYJ	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA2242L • W 24 • HT 42 • OAH 120 (OverAll Height)	GGO	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

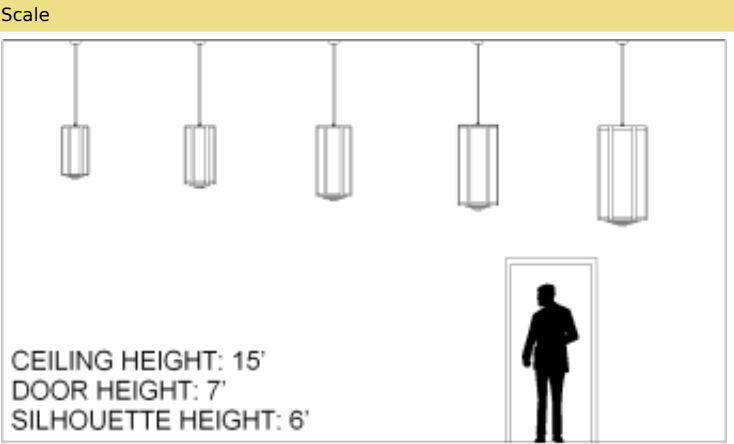

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandesent or LED
100W PAR38	Medium Base, 100W Max, Incandesent or LED

Finish Types

PC	Powder Coat
----	-------------

Finish Accent Types

WT	Wood Trim
CT	Custom Trim

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D2
1	D1
2	D3
3	D16

Options

SIL	Silhouette Symbol
LOGO	Custom Logo