


Hampton Series Pendant

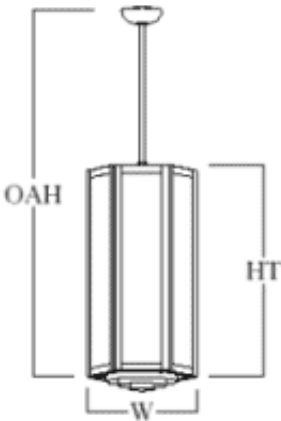


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA1224L • W 14 • HT 24 • OAH 72 (OverAll Height)	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1426L • W 16 • HT 26 • OAH 96 (OverAll Height)	DVG	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFB	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DTG	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	EOB	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFJ	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1631L • W 18 • HT 31 • OAH 96 (OverAll Height)	DFA	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DLX	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DCR	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT	WA	ST	SQ	SIL

						CT	AG	CH SM SP		LOGO
HA1836L • W 20 • HT 36 • OAH 120 (OverAll Height)	FYJ	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA2242L • W 24 • HT 42 • OAH 120 (OverAll Height)	GGO	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

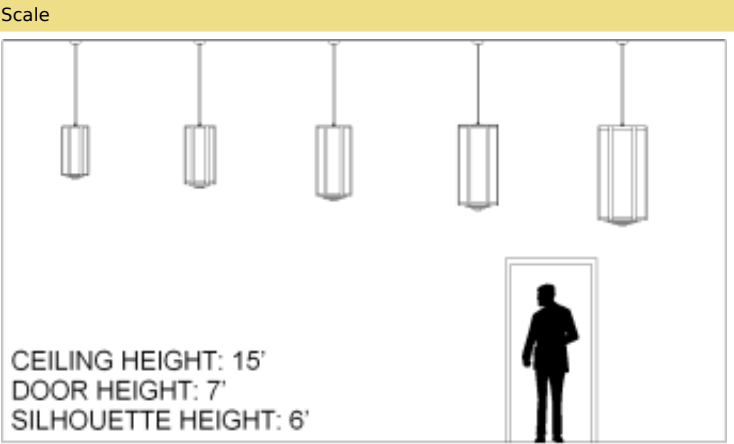

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- | | |
|------------|---|
| 60W A19 | Medium Base, 60W Max, Incandesent or LED |
| 100W PAR38 | Medium Base, 100W Max, Incandesent or LED |

Finish Types

- | | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Finish Accent Types

- | | |
|----|-------------|
| WT | Wood Trim |
| CT | Custom Trim |

Diffuser Types

- | | |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser |

Mountings

- | | |
|----|-----------------------------|
| ST | Stem |
| CH | Chain |
| SM | Surface Mount Chain |
| SP | Steep Pitch Canopy for Stem |

Louvers

- | | |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

- | | |
|---|-----|
| 0 | D1 |
| 1 | D2 |
| 2 | D3 |
| 3 | D16 |

Options

- | | |
|------|-------------------|
| SIL | Silhouette Symbol |
| LOGO | Custom Logo |