


Hampton Series Pendant

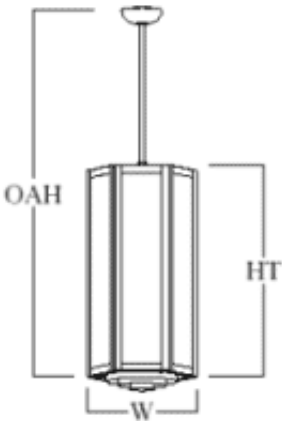


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA1224L • W 14 • HT 24 • OAH 72 (OverAll Height)	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1426L • W 16 • HT 26 • OAH 96 (OverAll Height)	DVG	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFB	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DTG	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	EOB	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFJ	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1631L • W 18 • HT 31 • OAH 96 (OverAll Height)	DFA	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DLX	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	DCR	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT	WA	ST	SQ	SIL

						CT	AG	CH SM SP		LOGO
HA1836L • W 20 • HT 36 • OAH 120 (OverAll Height)	FYJ	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA2242L • W 24 • HT 42 • OAH 120 (OverAll Height)	GGO	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

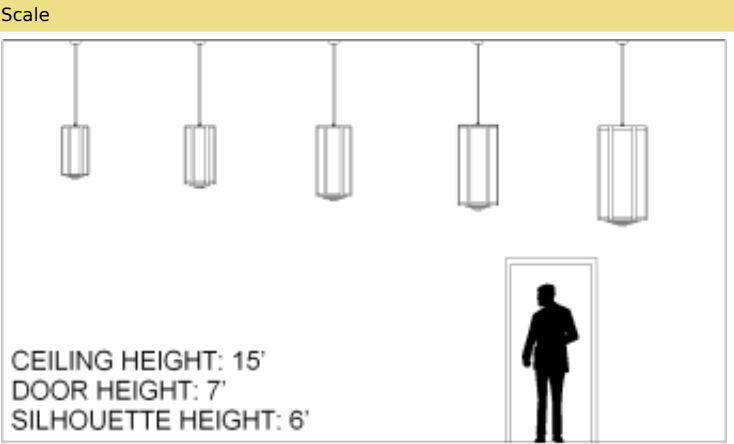

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandesent or LED
- 100W PAR38 Medium Base, 100W Max, Incandesent or LED

Finish Types

- PC Powder Coat

Finish Accent Types

- WT Wood Trim
- CT Custom Trim

Diffuser Types

- WA Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

- 0 D1
- 1 D2
- 2 D3
- 3 D16

Options

- SIL Silhouette Symbol
- LOGO Custom Logo