
# **Hampton Series Short Pendant**





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Finish Accent		Mounting	Louver	Options
<b>HA1207P</b> • W 14	ABL	2-100W A21 (200W)	1	PC	WT CT	WA AG	ST CH SM	SQ	SIL LOGO
• W 14 • HT 7 • OAH 48							SP		

(OverAll Height)

HA1408P	GGP	5,400lm LED (33W)	1	PC	WT	WA	ST	SQ	SIL
• W 16 • HT 8					СТ	AG	CH SM SP		LOGO
• OAH 48 (OverAll Height)	ABN	3-100W A21 (300W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1609P • W 18 • HT 9	GGS	5,400lm LED (33W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 48 (OverAll Height)	ABP	3-100W A21 (300W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
HA1610P • W 16" • HT 10"	GKP	5,400lm LED (33W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 48" (OverAll Height)	GKO	3-100W A21 (300W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>HA1811P</b> • W 20 • HT 11	GGT	5,400lm LED(33W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 48 (OverAll Height)	ABR	3-100W A21 (300W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 24 • HT 8	ENE	9,700lm LED(58W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO

• OAH 48


(OverAll Height)

ENF	15,800lm LED(116W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO
GIT	6-60W A19 (360W)	1	PC	WT CT	WA AG	ST CH SM SP	SQ	SIL LOGO

Abbreviation Key

#### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

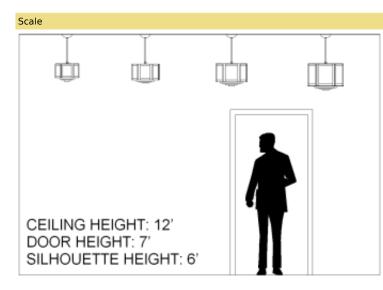

#### PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- · Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage ( $\tilde{\mathsf{T}}\textsc{riac}$  or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
  Ear elegen grapter than 25 decreas (from beginned), and a structure struc
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

### Lamps 100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED **Finish Types** PC Powder Coat **Finish Accent Types** Wood Trim WT Custom Trim CT **Diffuser Types** WA Standard Acrylic Diffuser Premium Glass Diffuser AG Mountings ST Stem CH Chain SM Surface Mount Chain SP Steep Pitch Canopy for Stem

## Louvers

SQ

LOGO

Square Cell

Custom Logo

Dimming Ty	pes
0	D3
1	D1
2	D2
Options	
SIL	Silhouette Symbol