


Hampton Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
HA0816B • W 10 • HT 16 • EXT 10	DED	2,100lm LED (16W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
	ACK	1-100W A21 (100W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
HA1020B • W 12 • HT 20 • EXT 12	DEE	3,100lm LED (22W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
	ACM	1-100W A21 (100W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
HA1224B • W 12" • HT 24" • EXT 14"	FEJ	4,500lm LED (33W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
	FEI	1-100W A21 (100W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
HA1426B • W 16 • HT 26 • EXT 16	DEG	6,300lm LED (47W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL
	ACR	2-100W A21 (200W)	1	PC	WT	WA AG	WM	SQ	CUT BD BL

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	100W A21 Medium Base, 100W Max, Incandesent or LED
	Finish Types
	PC Powder Coat
	Finish Accent Types

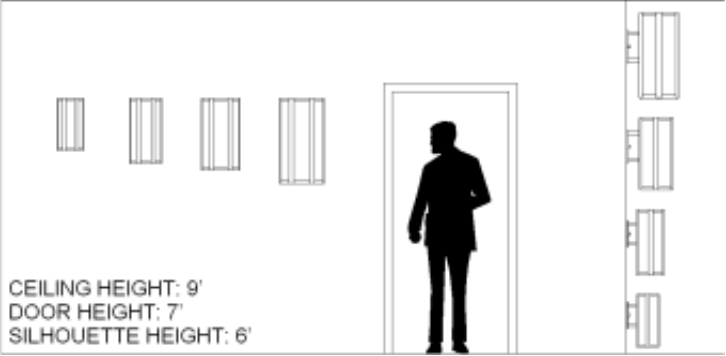

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer compatibility for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WT Wood Trim

Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

WM Wall Mount

Louvers

SQ Square Cell

Dimming Types

0 D1
1 D2

Options

CUT Cut-Out Symbol
BD Bottom Door
BL Bottom Lens