
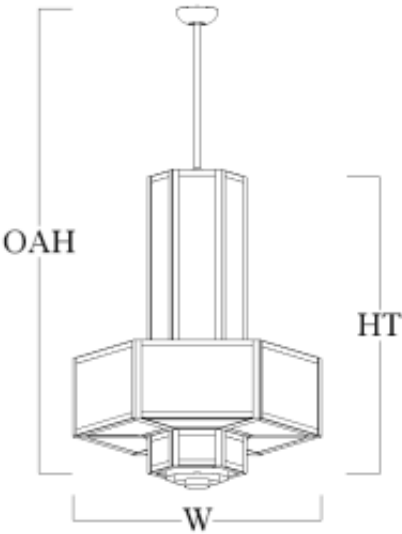


Hebron Series 3-Tier Large Pendant

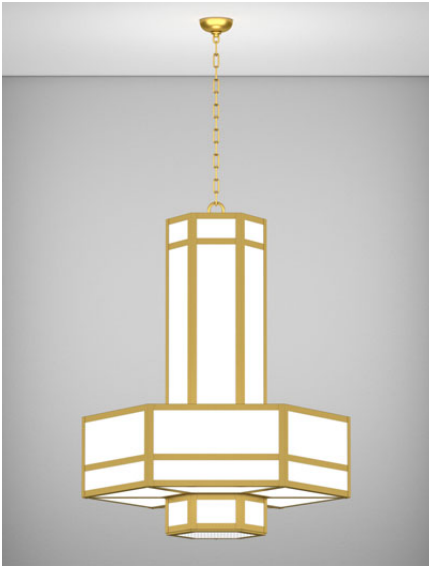


| Model Number                                                                | Lamping Code | Body Lamping        | Gallery Lamping     | Down Lamping            | Circuit | Finish | Diffuser | Mounting | Louver | Options  |
|-----------------------------------------------------------------------------|--------------|---------------------|---------------------|-------------------------|---------|--------|----------|----------|--------|----------|
| <b>HB3038H</b><br><br>• W 30"<br>• HT 38"<br>• OAH 72"<br>(OverAll Height)  | GLG          | 4-60W A19 (240W)    | 6-60W A19 (360W)    | 1-100W R40/Par38 (100W) | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
|                                                                             |              |                     |                     |                         |         |        |          |          |        |          |
| <b>HB3642H</b><br><br>• W 36<br>• HT 40<br>• OAH 96<br>(OverAll Height)     | DVO          | 15,300lm LED (87W)  | 32,600lm LED (216W) | 7,100lm LED (51W)       | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
|                                                                             | FWD          | 6-100W A21 (600W)   | 6-100W A21 (600W)   | 1-100W R40/Par38 (100W) | 3       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <b>HB4249H</b><br><br>• W 42"<br>• HT 49"<br>• OAH 120"<br>(OverAll Height) | EAU          | 15,300lm LED (87W)  | 32,600lm LED (216W) | 12,500lm LED (93W)      | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
|                                                                             | FWC          | 6-100W A21 (600W)   | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <b>HB4856H</b><br><br>• W 48"<br>• HT 56"<br>• OAH 120"<br>(OverAll Height) | ESP          | 25,700lm LED (159W) | 32,600lm LED (216W) | 12,500lm LED (93W)      | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
|                                                                             | FWM          | 6-100W A21 (600W)   | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <b>HB5460H</b><br><br>• W 54"<br>• HT 60"<br>• OAH 120"<br>(OverAll Height) | FZD          | 27,800lm LED (132W) | 37,600lm LED (260W) | 12,500lm LED (93W)      | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
|                                                                             | FWE          | 6-100W A21 (600W)   | 12-100W A21 (1200W) | 1-100W R40/Par38 (100W) | 3       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |
| <b>HB6072H</b><br><br>• W 60"<br>• HT 72"<br>• OAH 120"<br>(OverAll Height) | GLR          | 27,800lm LED (146W) | 37,600lm LED (260W) | 12,500lm LED (93W)      | 2       | PC     | WA AG    | ST CH SP | SQ     | SIL LOGO |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

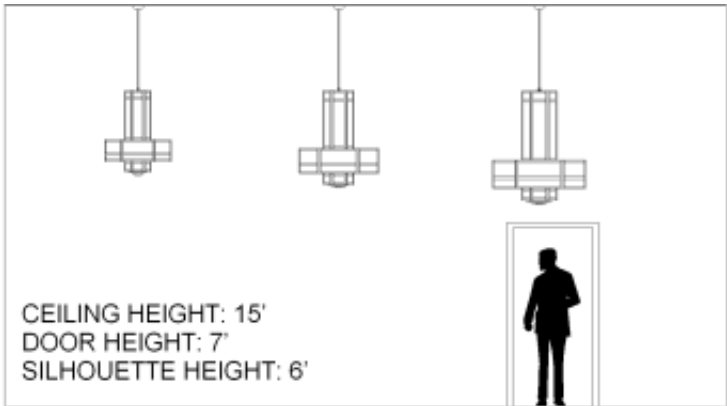

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- |                |                                            |
|----------------|--------------------------------------------|
| 60W A19        | Medium Base, 60W Max, Incandescent or LED  |
| 100W R40/Par38 | Medium Base, 100W Max, Incandescent or LED |

Finish Types

- |    |             |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Diffuser Types

- |    |                           |
|----|---------------------------|
| WA | Standard Acrylic Diffuser |
| AG | Premium Glass Diffuser    |

Mountings

- |    |                             |
|----|-----------------------------|
| ST | Stem                        |
| CH | Chain                       |
| SP | Steep Pitch Canopy for Stem |

Louvers

- |    |             |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

- |   |    |
|---|----|
| 0 | D1 |
| 1 | D3 |

Options

- |      |                   |
|------|-------------------|
| SIL  | Silhouette Symbol |
| LOGO | Custom Logo       |