


## Hebron Series Pendant

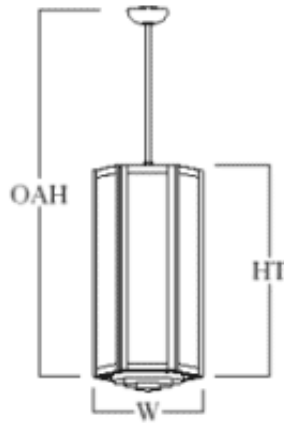


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>HB1222L</b> <ul style="list-style-type: none"> <li>• W 12"</li> <li>• HT 22"</li> <li>• OAH 72" (OverAll Height)</li> </ul>	AAD	3-100W A21 (300W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
<b>HB1426L</b> <ul style="list-style-type: none"> <li>• W 14"</li> <li>• HT 26"</li> <li>• OAH 96" (OverAll Height)</li> </ul>	DVG	14,500lm LED (88W)	5,000lm LED (33W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DFB	14,500lm LED (88W)	7,000lm LED (47W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DTG	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DFJ	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DHI	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
<b>HB1631L</b> <ul style="list-style-type: none"> <li>• W 16"</li> <li>• HT 31"</li> <li>• OAH 96" (OverAll Height)</li> </ul>	DFA	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DLX	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DCR	29,500lm LED (194W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DHJ	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
<b>HB1836L</b>	DDL	23,500lm LED (131W)	12,000lm LED (100W)	2	PC	AD	ST	CR	D1

<ul style="list-style-type: none"> <li>• W 18"</li> <li>• HT 36"</li> <li>• OAH 120" (OverAll Height)</li> </ul>	DHK	9-100W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	CH SM SP	SQ	SIL
<b>HB2242L</b>	DNF	32,300lm LED (197W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
<ul style="list-style-type: none"> <li>• W 22"</li> <li>• HT 42"</li> <li>• OAH 120" (OverAll Height)</li> </ul>	FCC	9-100W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SM SP	CR SQ	SIL

**SAMPLE CATALOG NUMBER**

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

**Scale**

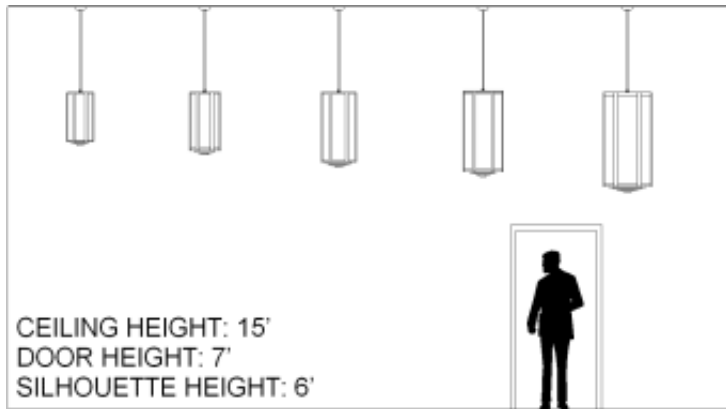

**PRODUCT FEATURES**

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

**Abbreviation Key**

**Dimensions**

- W Width
- HT Height
- OAH OverAll Height

**Lamps**

- 100W A21 Medium Base, 100W Max, Incandesent or LED
- 300W R40 300W R40, medium base

**Finish Types**

- PC Powder Coat

**Diffuser Types**

- AD Standard Acrylic Diffuser
- AG Premium Glass Diffuser

**Mountings**

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

**Louvers**

- CR Concentric Ring
- SQ Square Cell

**Options**

- SIL Silhouette Symbol
- D1 LED 0-10V low voltage control dimming