


Hebron Series Pendant

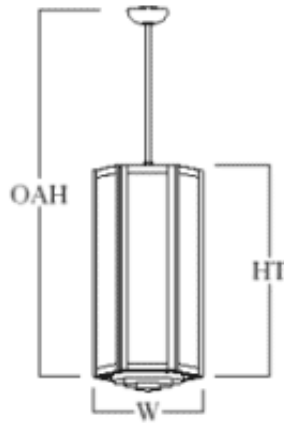


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HB1222L <ul style="list-style-type: none"> • W 12" • HT 22" • OAH 72" (OverAll Height) 	AAD	3-100W A21 (300W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
HB1426L <ul style="list-style-type: none"> • W 14" • HT 26" • OAH 96" (OverAll Height) 	DVG	14,500lm LED (88W)	5,000lm LED (33W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DFB	14,500lm LED (88W)	7,000lm LED (47W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DTG	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DFJ	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DHI	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
HB1631L <ul style="list-style-type: none"> • W 16" • HT 31" • OAH 96" (OverAll Height) 	DFA	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DLX	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DCR	29,500lm LED (194W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
	DHJ	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL
HB1836L	DDL	23,500lm LED (131W)	12,000lm LED (100W)	2	PC	AD	ST	CR	D1

<ul style="list-style-type: none"> • W 18" • HT 36" • OAH 120" (OverAll Height) 	DHK	9-100W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	CH SM SP	SQ	SIL
HB2242L	DNF	32,300lm LED (197W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 SIL
<ul style="list-style-type: none"> • W 22" • HT 42" • OAH 120" (OverAll Height) 	FCC	9-100W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SM SP	CR SQ	SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

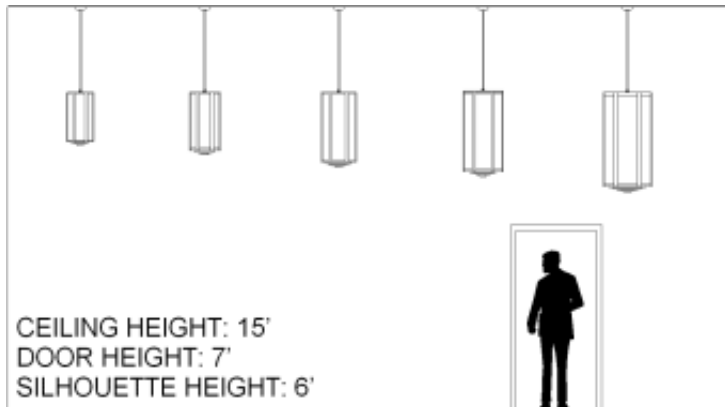

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

- W Width
- HT Height
- OAH OverAll Height

Lamps

- 100W A21 Medium Base, 100W Max, Incandesent or LED
- 300W R40 300W R40, medium base

Finish Types

- PC Powder Coat

Diffuser Types

- AD Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- CR Concentric Ring
- SQ Square Cell

Options

- SIL Silhouette Symbol
- D1 LED 0-10V low voltage control dimming