
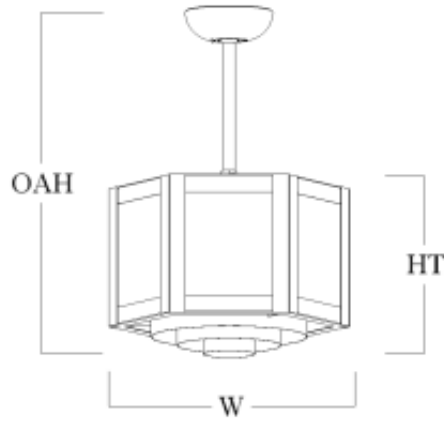


Hebron Series Short Pendant

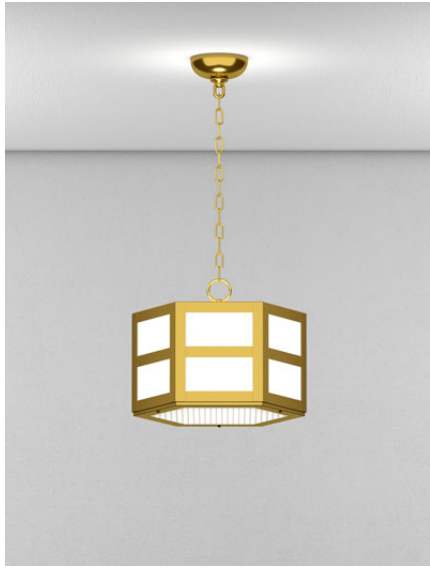


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HB1207P • W 12 • HT 7 • OAH 48 (OverAll Height)	ABL	2-100W A21 (200W)	1	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
HB1408P • W 14 • HT 8 • OAH 48 (OverAll Height)	DTT	2,600lm LED (22W)	1	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	ABN	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
HB1609P • W 16 • HT 9 • OAH 48 (OverAll Height)	DTU	3,800lm LED (31W)	1	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	ABP	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
HB1811P • W 18 • HT 11 • OAH 48 (OverAll Height)	DTV	3,800lm LED (31W)	1	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	ABR	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
HB2208P • W 22 • HT 8 • OAH 48 (OverAll Height)	ENE	8,500lm LED (53W)	1	PC	AD AG	ST CH SM SP	CR SQ	D1 D2 LOGO SIL
	ENF	13,900lm LED (106W)	1	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

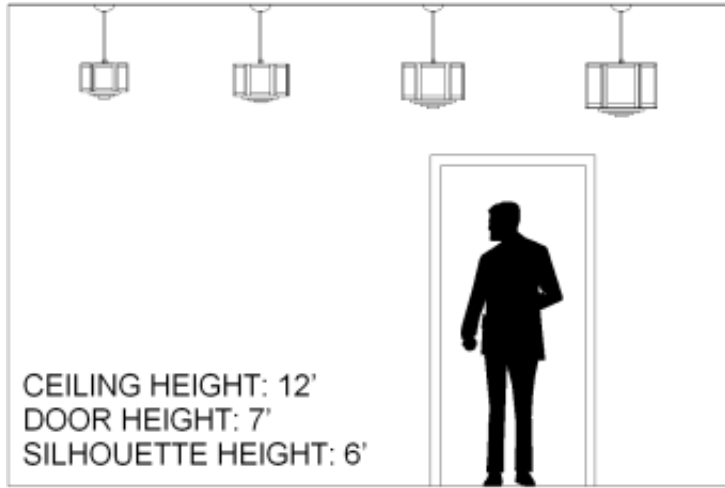

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandescent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

AG Premium Glass Diffuser

Mountings

ST Stem

CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

Louvers

CR Concentric Ring

SQ Square Cell

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

D2 LED Triac/ELV dimming options include integral 120v dimming drivers

Options

SIL Silhouette Symbol

LOGO Custom Logo