


Hebron Series Short Pendant

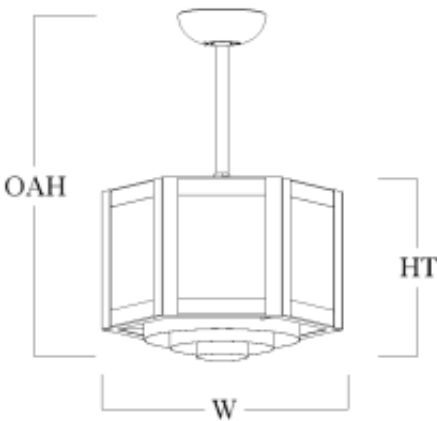


| Model Number                                                               | Lamping Code | Body Lamping      | Circuit | Finish | Diffuser | Mounting             | Louver | Options     |
|----------------------------------------------------------------------------|--------------|-------------------|---------|--------|----------|----------------------|--------|-------------|
| <b>HB1207P</b><br><br>• W 12"<br>• HT 7"<br>• OAH 48"<br>(OverAll Height)  | ABL          | 2-100W A21 (200W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
|                                                                            |              |                   |         |        |          |                      |        |             |
| <b>HB1408P</b><br><br>• W 14"<br>• HT 8"<br>• OAH 48"<br>(OverAll Height)  | GGP          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
|                                                                            | ABN          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
| <b>HB1609P</b><br><br>• W 16"<br>• HT 9"<br>• OAH 48"<br>(OverAll Height)  | GG5          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
|                                                                            | ABP          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
| <b>HB1610P</b><br><br>• W 16"<br>• HT 10"<br>• OAH 48"<br>(OverAll Height) | GKP          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
|                                                                            | GKO          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
| <b>HB1811P</b><br><br>• W 18"<br>• HT 11"<br>• OAH 48"<br>(OverAll Height) | GGT          | 5,400lm LED (33W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
|                                                                            | ABR          | 3-100W A21 (300W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |
| <b>HB2208P</b><br><br>• W 22"<br>• HT 8"<br>• OAH 48"<br>(OverAll Height)  | ENE          | 9,700lm LED (58W) | 1       | PC     | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ     | SIL<br>LOGO |

|     |                     |   |    |          |                      |    |             |
|-----|---------------------|---|----|----------|----------------------|----|-------------|
| ENF | 15,800lm LED (116W) | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ | SIL<br>LOGO |
| GIT | 6-60W A19 (360W)    | 1 | PC | WA<br>AG | ST<br>CH<br>SM<br>SP | SQ | SIL<br>LOGO |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

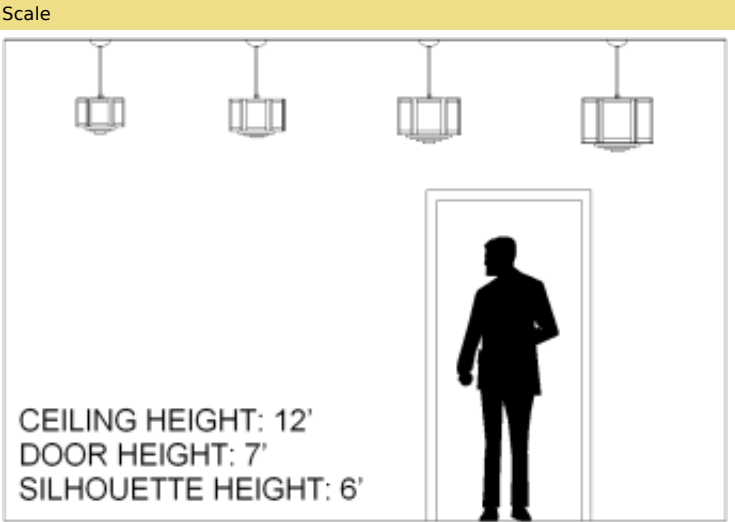

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 100W A21      Medium Base, 100W Max, Incandesent or LED
- 60W A19      Medium Base, 60W Max, Incandesent or LED

Finish Types

- PC      Powder Coat

Diffuser Types

- WA      Standard Acrylic Diffuser
- AG      Premium Glass Diffuser

Mountings

- ST      Stem
- CH      Chain
- SM      Surface Mount Chain
- SP      Steep Pitch Canopy for Stem

Louvers

- SQ      Square Cell

Dimming Types

- 0      D1
- 1      D2
- 2      D3

Options

- SIL      Silhouette Symbol
- LOGO      Custom Logo